

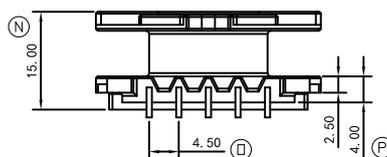
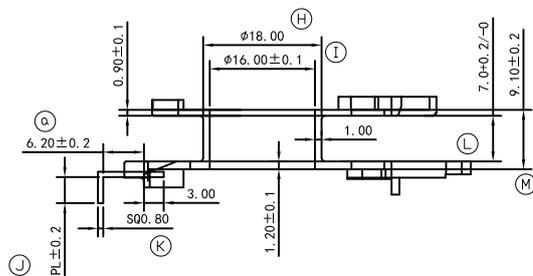
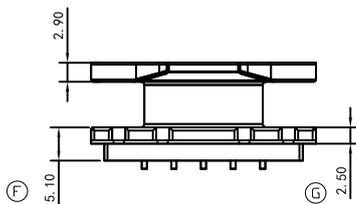


红色线条位置是合模线

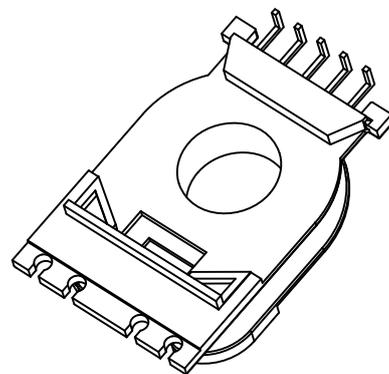

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.80kg MIN(頂部葉片1.0kg MIN)
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫前拉力: 1.00kg MIN
焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模

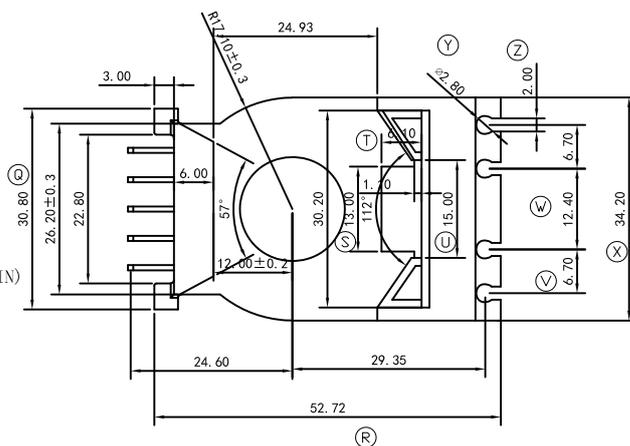

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	a尺寸5.20改為6.20	2020/08/05	03		
02			04		

NAME	LR-41*16 (5P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-4112	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.0 kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC.: :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: SEP 24 2020	