

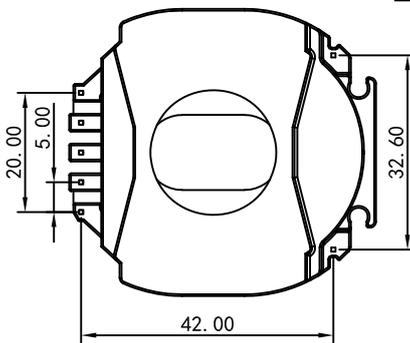

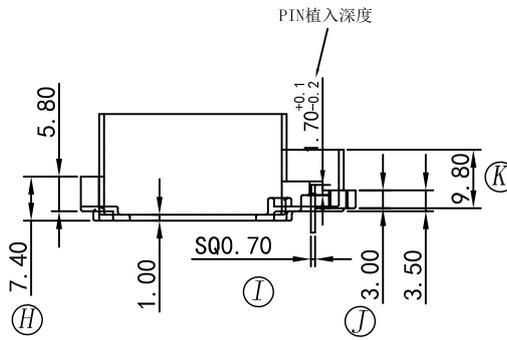



紅色線條位置是合模線

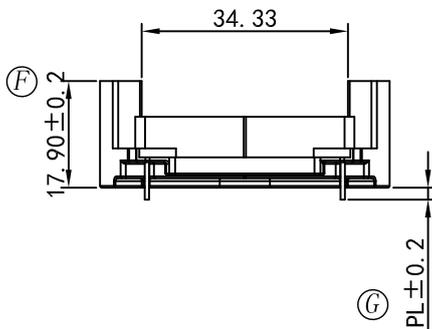

HX-4609A/B組合圖

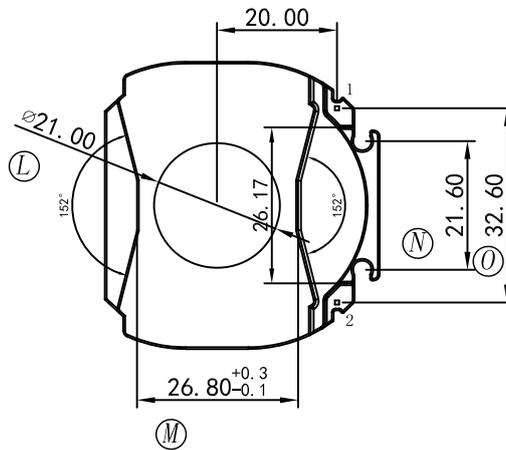

底部平貼度0.4 MAX.

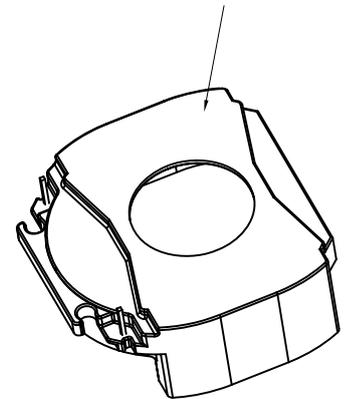


備註說明:

1. 材質: PM-9630, BK
2. 強度要求: 1.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 焊錫後拉力: 2.0kg MIN
6. 圓孔方PIN
7. 與HX-4609A裝配
8. 模具狀況: 量產模

客户确认		RoHS HF
签回		

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	CC46-17-1 (2P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-4609B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD kg MIN				UL REC. :94V0	
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY		DATE: SEP 27 2024		