
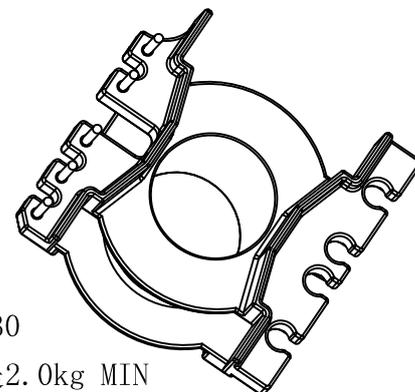
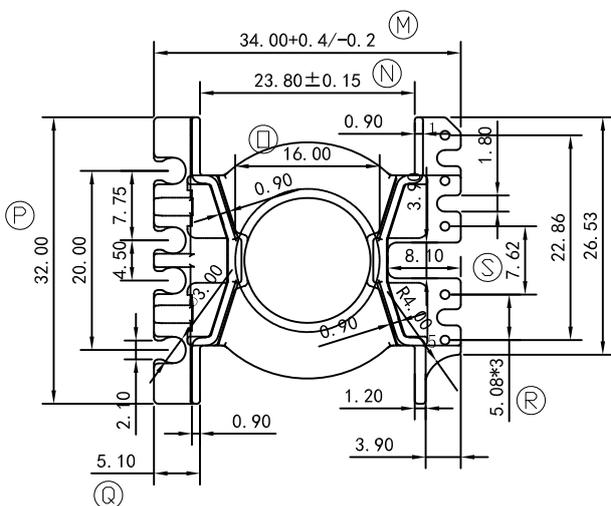
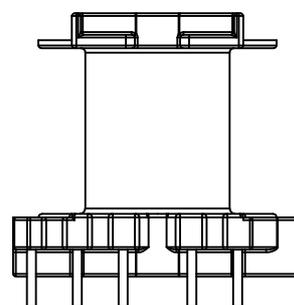
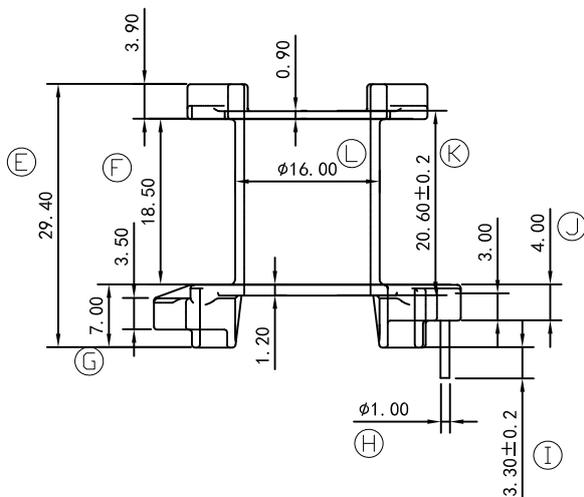


進膠位置做預缺口

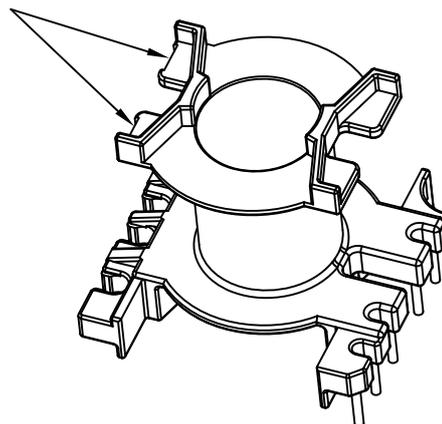

備註說明:

1. 材質: PM-9630
2. 拉力: 焊後是2.0kg MIN
3. 耐壓要求: 4KV/1mA/3SEC
4. 焊錫溫度: 420° ±5° 3SEC
5. 強度要求: 2.50kg MIN; 頂部葉片1.80kg MIN
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	N尺寸由23.40改23.80	2020/06/23	03		
02			04		

NAME	PQ-3230 (5P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3249	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>		TOLERANCE OF PIN DIA ±0.05				PIN TENSION LOAD 1.5 kg MIN	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3				UL REC.: 94V0	
DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY		DATE: MAY 20 2020		