




HX-2566



紅色線條位置是合模線

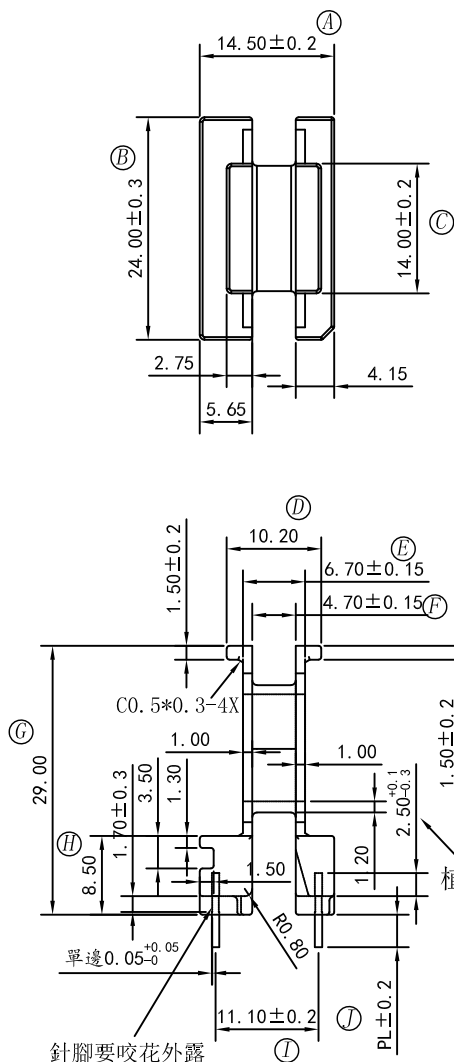


針腳要咬花外露



1. 材質：PM-9823
2. 強度要求：1.80kg MIN
3. 耐壓要求：4KV/1mA/3SEC
4. 焊錫溫度：420° ±10° 3SEC
5. 焊錫前拉力：1.00kg MIN
焊錫後拉力：1.50kg MIN
6. 模具狀況：量產模

客户确认 签回		RoHS HF
------------	--	------------

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EQ-2513 (12P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	± 1°	
DRAWING NO.	HX-2566	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00	
HUAXIN 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com			TOLERANCE OF PIN DIA ±0.05					
			PIN TENSION LOAD kg MIN			UL REC. :94V0		
			TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
			DRAWN & DRAFTED BY	LIN HUA JING		CHECKED & APPROVED BY		