


注：插PIN 深2.50mm

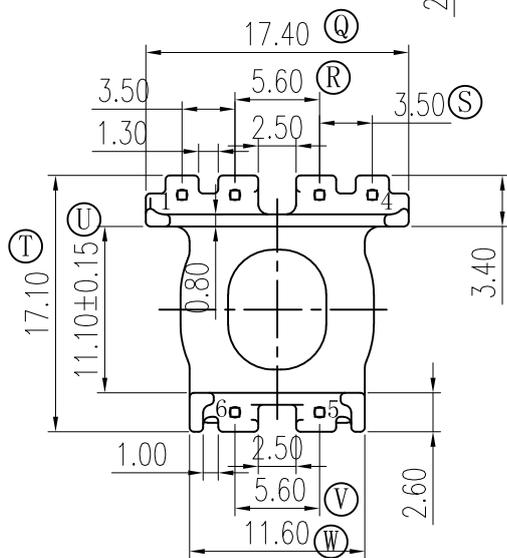

備註說明：

1. 材質：PM-9630
2. 強度要求：1.80kg MIN
3. 耐壓要求：4KV/1.5mA/1分鐘
4. 焊錫溫度：450° ±10° 3SEC
5. 焊錫前拉力：1.50kg MIN  
焊錫後拉力：2.00kg MIN
6. 模具狀況：量產模

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ATP-1715(6P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1714	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



东莞市华欣塑胶制品有限公司  
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.  
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111  
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA ±0.05		
PIN TENSION LOAD kg MIN		UL REC. :94V0
TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:		DEC 29 2018