


備註說明:

- PART NO.: HX-2037 量產模
- MATERIAL: PET-FR530 MUST MEET UL94V-0
- COLOR: NATURAL (米黃色)
- CORE TYPE: EF-2022
- MATERIAL OF PIN: 3/4H CP WIRE, SQ0.64 ± 0.05
- DIMENSION MARK: \triangle MAIN DIM. \otimes SECOND DIM, OTHER WIRE ARE REFERENTIAL DIM. 标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。
- 強度要求: 2.00kg MIN, 葉片1.00kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: 420° ± 10° 3SEC
- 拉力: 焊後拉力 1.5kg MIN

進料口位置
寬度是5.00

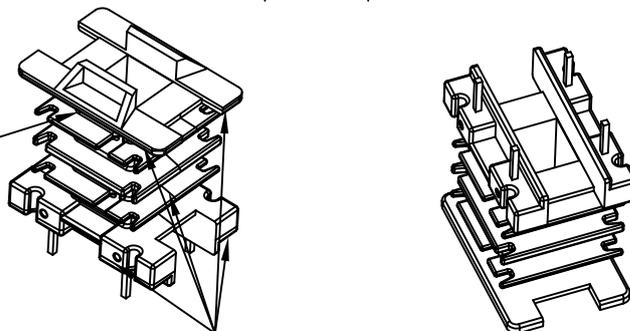

紅色線條是合模線位置

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
14.00	19.70	22.60	10.00	4.50	1.00	0.60	14.00	13.50	13.50	15.80	14.60	PL	10.00	3.10	13.50	19.70	7.50	6.20	6.20	7.50	0.64
±0.15	±0.2	±0.2	±0.15	+0.2 -0.1	±0.1	±0.1	±0.15	±0.2	±0.2	+0.1 -0.2	±0.2	±0.2	±0.15	±0.1	±0.2	±0.2	±0.2	±0.1	±0.1	±0.2	±0.05

RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
A	叶片两边过线槽改为相对称	2017/08/12	C		
B			D		

NAME	EF-2022 (4P)	MATERIAL	PET-FR530	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2037	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN PITCH ±0.20				TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		PIN TENSION LOAD 1.0 kg MIN		UL REC.: 94V0			
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	LIN GUO PING	DATE:	JUN 12 2017		