











记号	日期	修改记录
1	2010/07/02	1. B, R尺寸由26.60, 6.80改为26.90, 7.10 (mm)

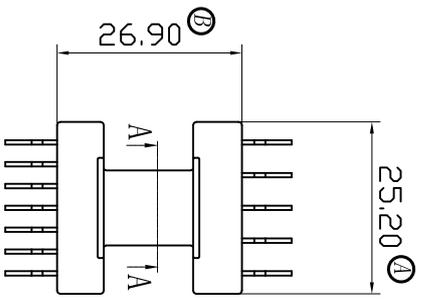

SECTION A-A(2:1)

DETAIL C (1:1)

DETAIL D (1:1)

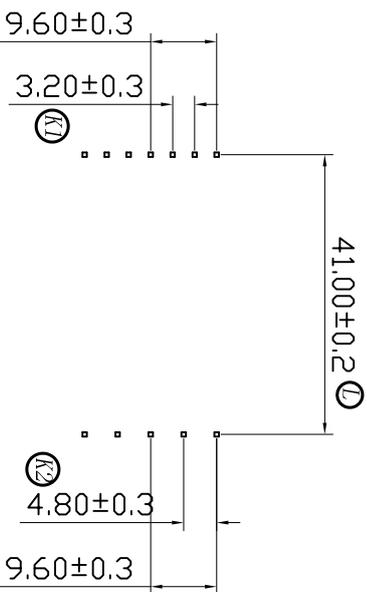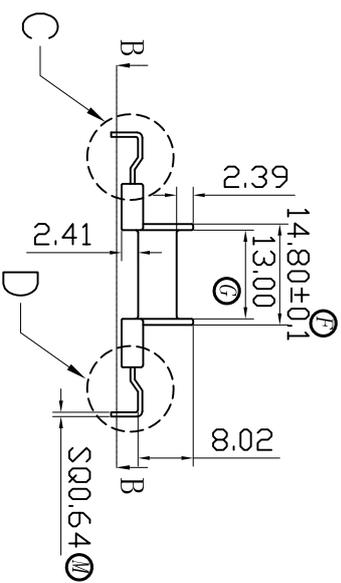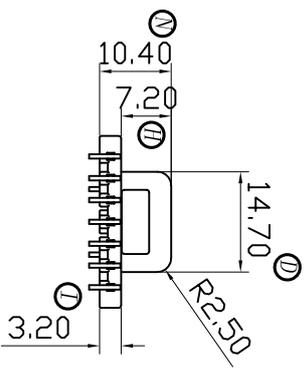

SECTION B-B

注: 1. 7PIN边插针机直PIN外露长11.00±0.1mm
 2. 5PIN边插针机直PIN外露长10.70±0.1mm



NAME	EFD-2020 (12P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2017	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
TOLERANCE OF PIN DIA. ±0.05		PIN TENSION LOAD 1.0 kg/MIN		UL REC.: 94V0			
TOLERANCE: 0<L<4±0.1		4<L<16±0.2		16<L<63±0.3			
DRAWN & CHECKED BY: LIN HUA JING		APPROVED BY: LIN GUO PING		DATE: JUL 02 2010			
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86389888 FAX: 0769-86388111 http://www.hx00001n.com E-Mail: hx00001n@foxp.com							