

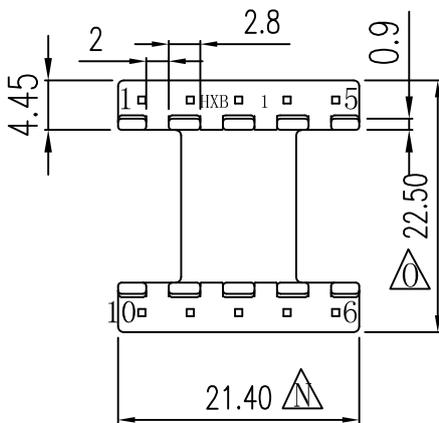
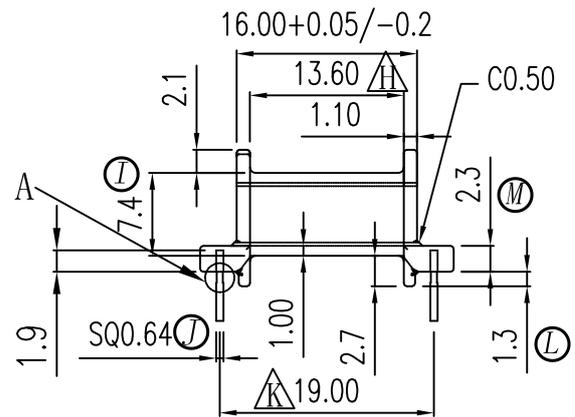
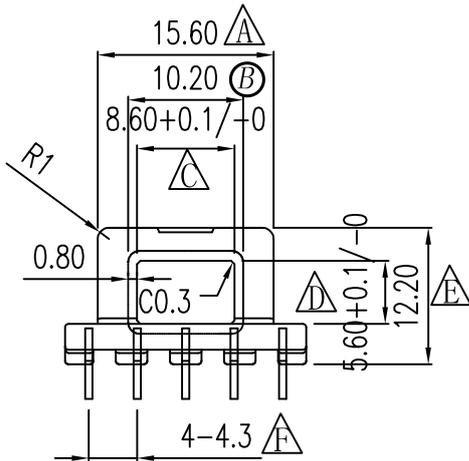
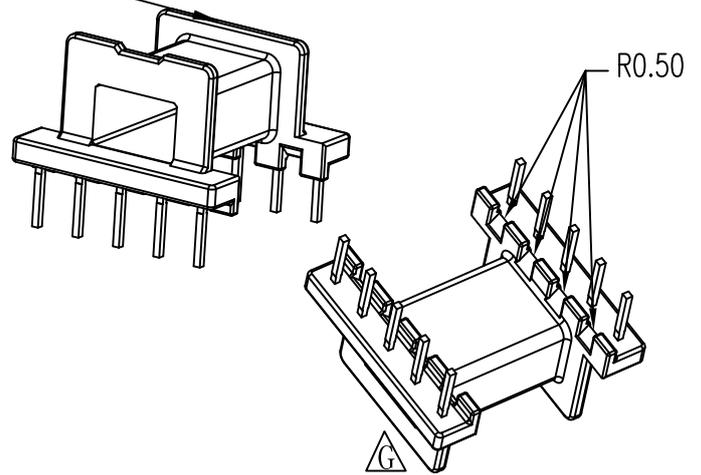


進料口



備註說明:

1. PART NO. : HX-2210 正式模
2. MATERIAL: T375HF MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EFD-2222
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.64±0.05
6. DIMENSION MARK : \triangle MAIN DIM. , \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM.
 标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。



7. 強度要求: 1.80kg MIN
8. 耐壓要求: 4KV/1.5mA/1分鐘
9. 焊錫溫度: 450° ±10° 3SEC
10. 拉力: 焊後拉力 1.53kg MIN

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EFD-2222 (10P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2210	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: OCT 21 2013	