

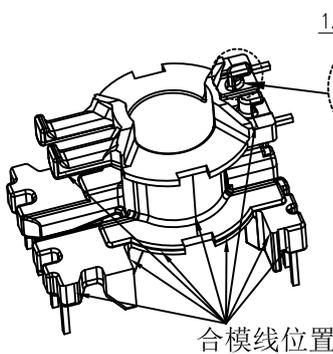
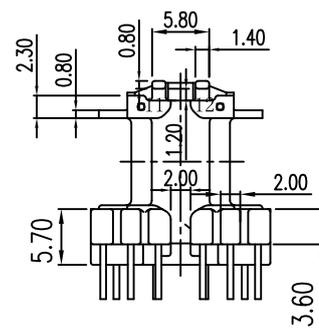
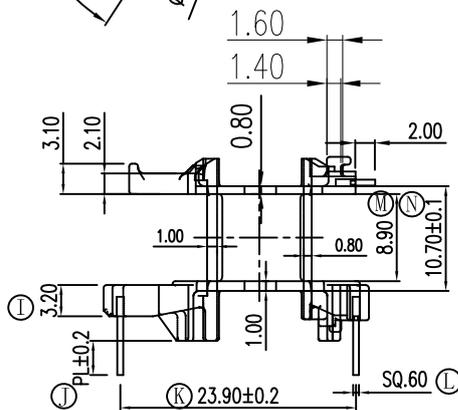
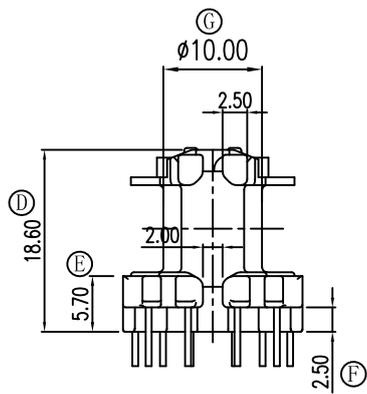
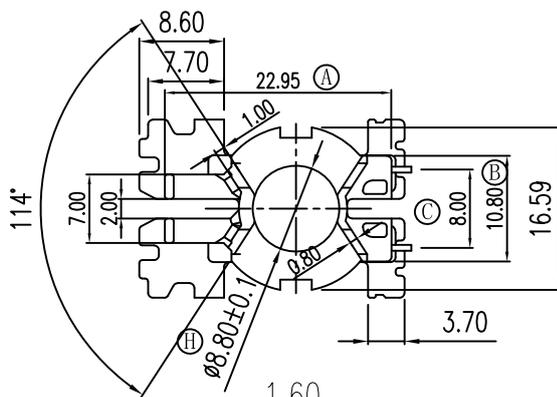
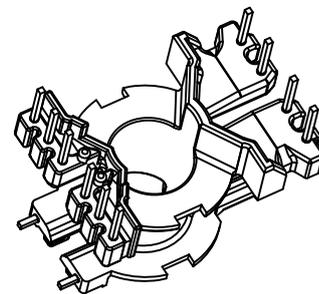


进胶口位置, 进胶口宽1.10

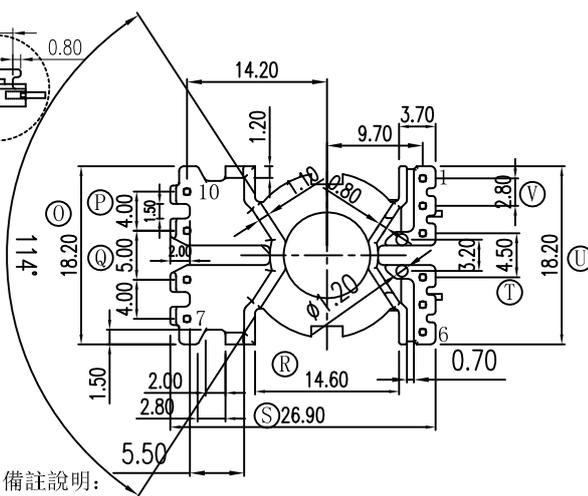

合模线位置

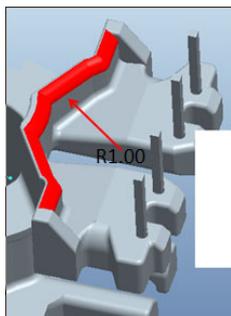

備註說明:

1. 材質: PM-9823
2. 強度要求: 1.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	進膠口由頂部改到PIN台BASE位置, 4PIN邊BASE擋板加R角1.00	2017/04/10	03		
02			04		

NAME	LQ-2016B(10+2P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2040	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
<b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com				TOLERANCE OF PIN DIA ±0.05			
				PIN TENSION LOAD kg MIN		UL REC. :94V0	
				TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAY 12 2016	