




PIN座強度: 1.0kg MIN

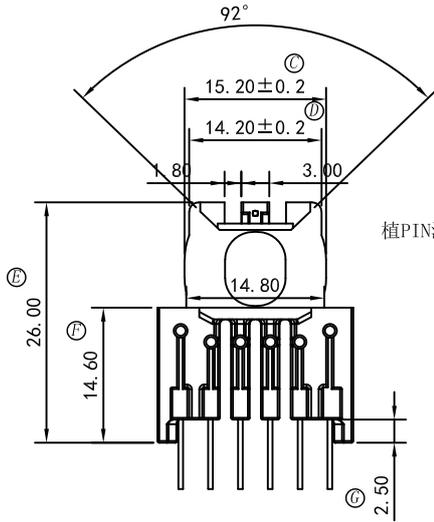

植PIN深度尺寸


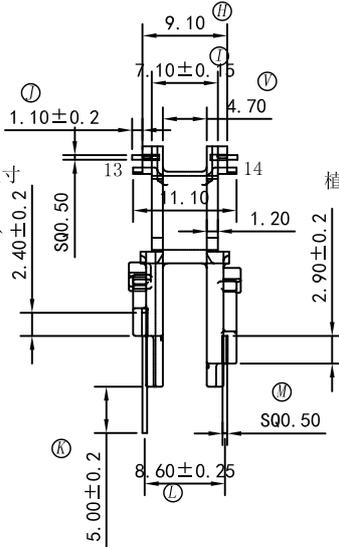


植PIN深度尺寸

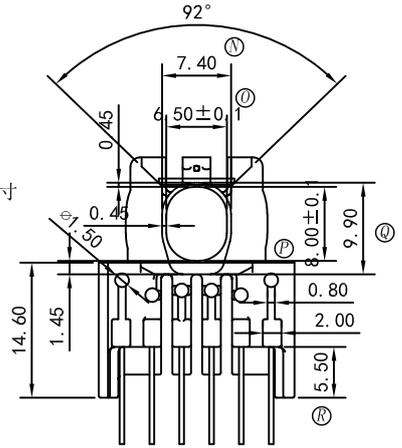

備註說明:

1. 材質: PM-9630
2. 強度要求: 2.0kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫前拉力: 1.0kg MIN
焊錫後拉力: 1.5kg MIN
6. 模具狀況: 量產模

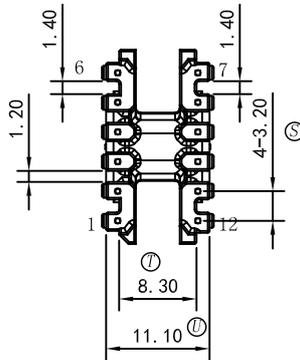

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	LQS-20 (12P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2063	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY LIN HUA JING		CHECKED & APPROVED BY	
				DATE: NOV 19 2024			