



PIN咬花外露
DETAIL A (2:1)

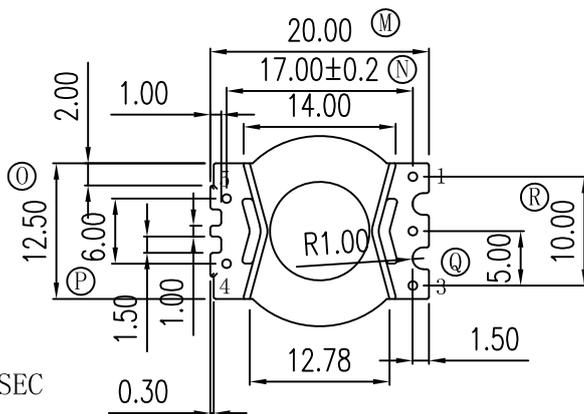

備註說明:

1. 材質: PM-9630
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/60SEC
4. 焊錫溫度: 450° ± 10° 3SEC
5. 焊後拉力: 1.50kg MIN
6. 模具狀況: 量產模

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
9.10	17.50	9.50	16.50	3.00	PL	8.90	10.20	4.70	2.50	0.80	10.60	20.00	17.00	12.50	6.00	5.00	10.00
±0.1	+0.15/-0.3	±0.2	±0.3	±0.1	±0.2	±0.2	±0.2	±0.2	±0.1	±0.05	+0.1/-0.2	±0.3	±0.2	±0.2	±0.2	±0.2	±0.2

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-2017 (5P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2041	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>		TOLERANCE OF PIN DIA ±0.05				PIN TENSION LOAD kg MIN	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3				UL REC.: 94V0	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 28 2016	