



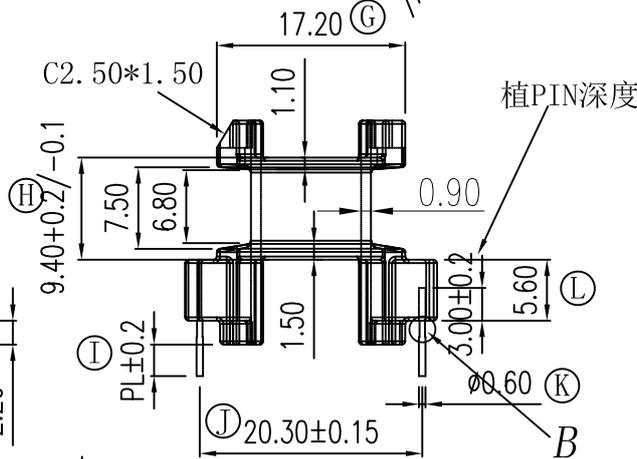
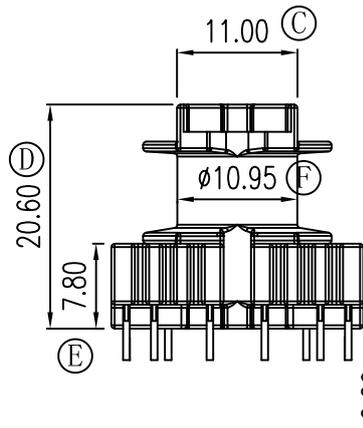
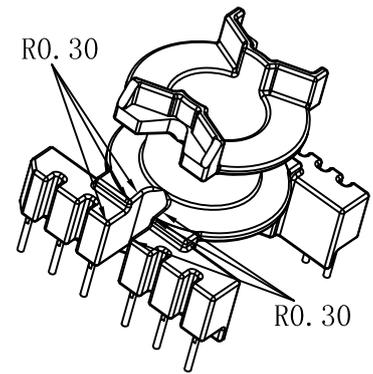


紅色線條是合模線位置


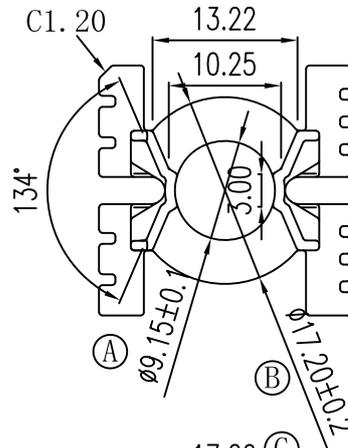


PIN咬花外露
DETAIL B(2:1)



進膠口位置
寬度是2.00

紅色線條是合模線位置

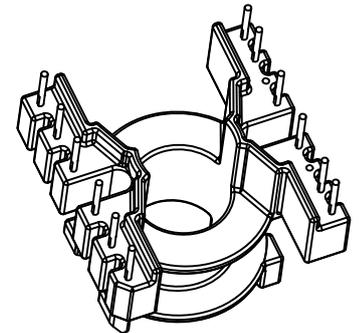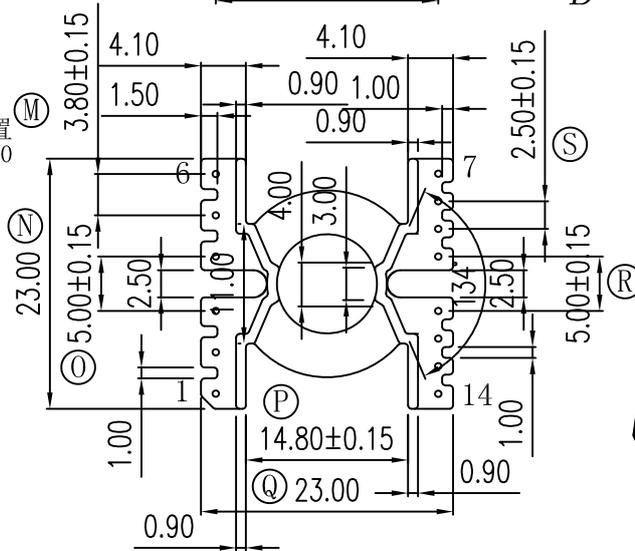

備註說明:

1. 材質: PM-9823
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/60SEC
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊後拉力: 1.50kg MIN
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-2016(14P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2062	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC.: 94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAY 27 2022	