


備註說明:

1. 材質: PM-9823
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後1.5kg MIN
6. 模具狀況: 量產模

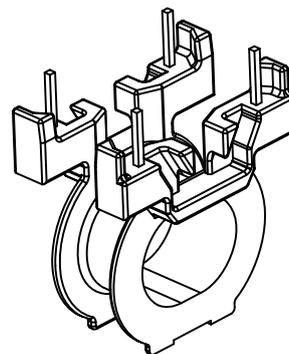

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	△J尺寸25.50改為25.00;K尺寸7.30改為6.80;L尺寸4.50改為4.00	2022/03/01	03		
02			04		

NAME	ATQ-23-14.6(4P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2318	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD		kg MIN		UL REC. :94V0		
	TOLERANCE: 0<L<4: ±0.1		4<L<16: ±0.2		16<L<63: ±0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	MAR 01 2022		