

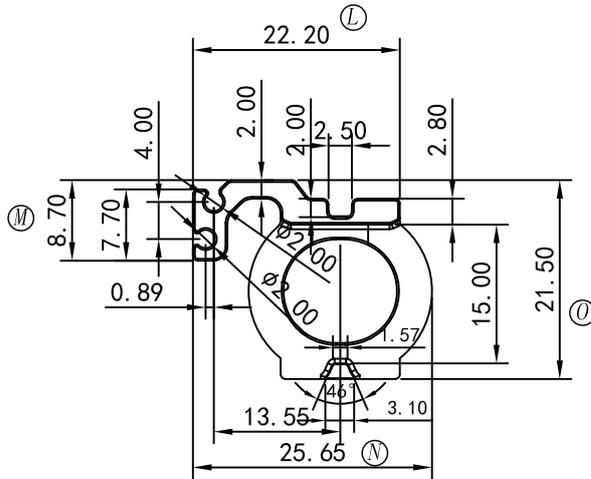
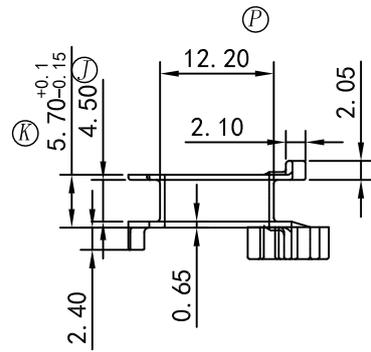
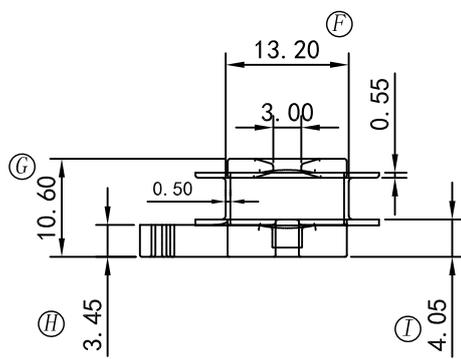


進膠口位置

紅色線條是合模線位置




備註說明:

1. 材質: PM-9630
2. 強度要求: 2.00kg MIN, 葉片強度1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 模具狀況: 量產模

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ATQ-23-2-11	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-2319	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD		kg MIN		UL REC. :94V0		
	TOLERANCE: 0<L<4: ±0.1		4<L<16: ±0.2		16<L<63: ±0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	JUL 04 2022		