

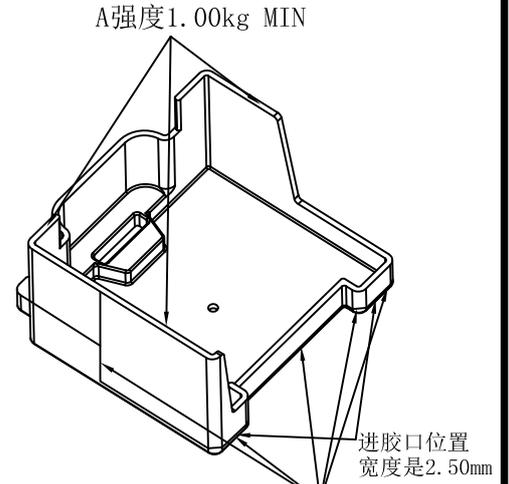
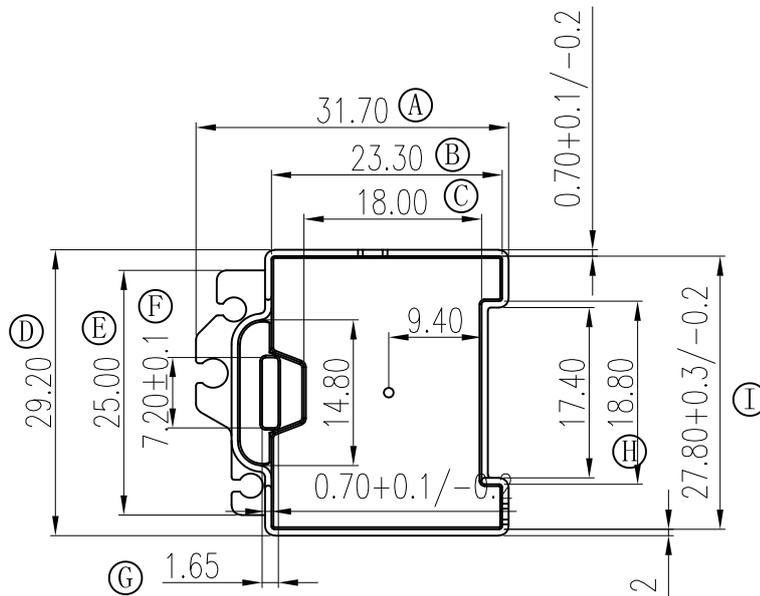
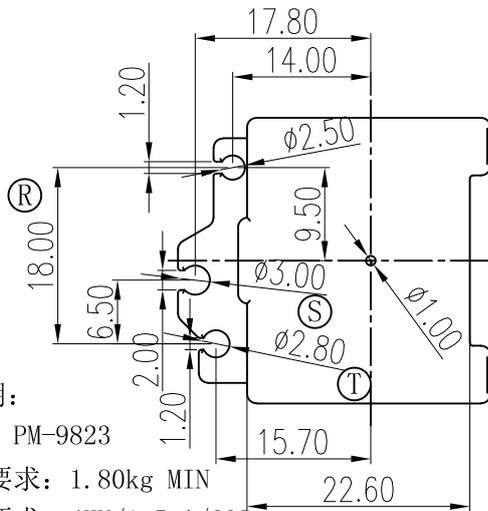



HX-2706B

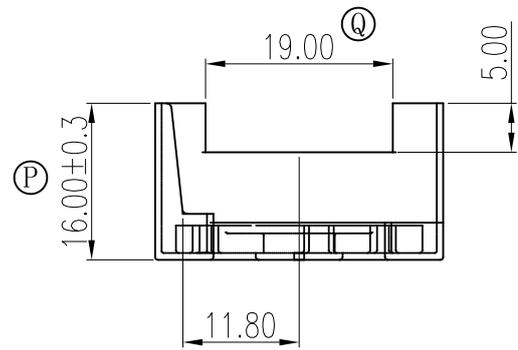

红色线条是合模位置

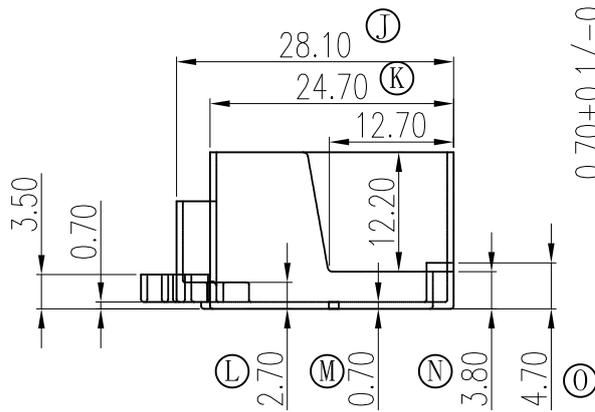

此平面平贴度0.20mm MAX

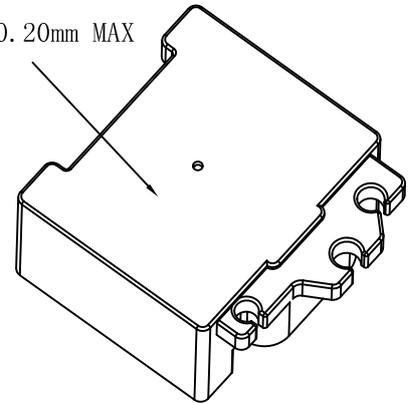

備註說明:

1. 材質: PM-9823
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/60S
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力:
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	增加底部平贴度管控0.20mm MAX要求	2023/08/24	03		
02			04		

NAME	ATQ-2716	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2706B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>		TOLERANCE OF PIN DIA ±0.05				UL REC.: 94V0	
		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: AUG 26 2017	