

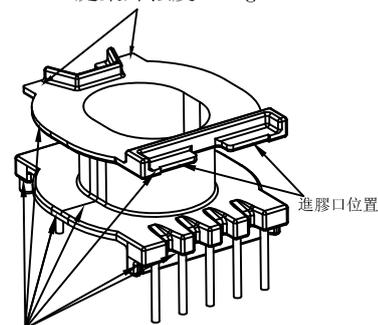

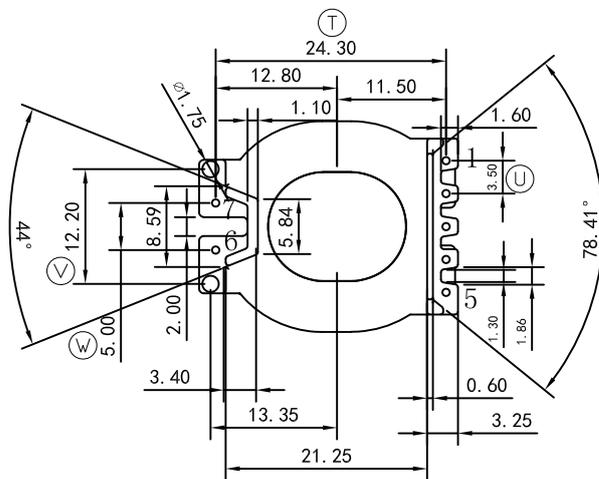
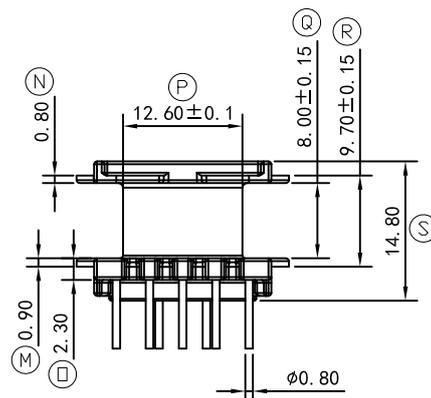


A處葉片強度1.3kg MIN

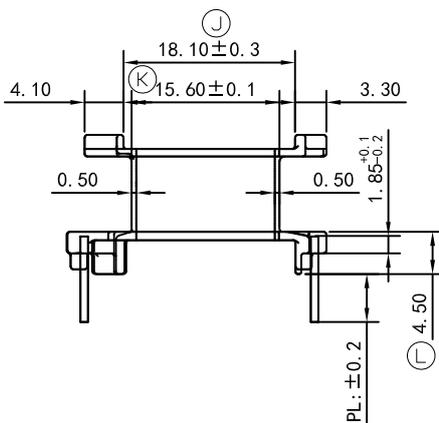

紅色線條是合模線位置

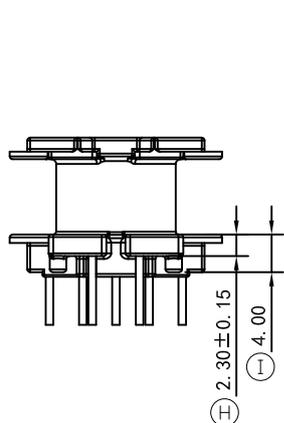


備註說明:

1. 材質: T200HF
2. 強度要求: 1.8kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ATQ-2716 (7P)	MATERIAL	T200HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2716	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD 1.0 kg MIN				UL REC. :94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN PENG FEI	CHECKED & APPROVED BY		LIN HUA JING	DATE:	MAY 15 2025