
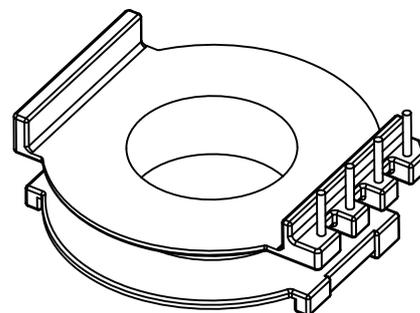
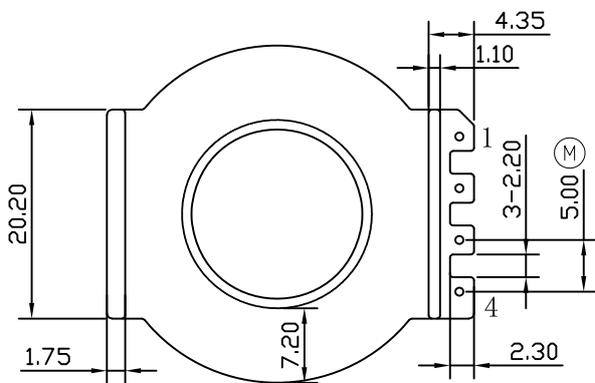
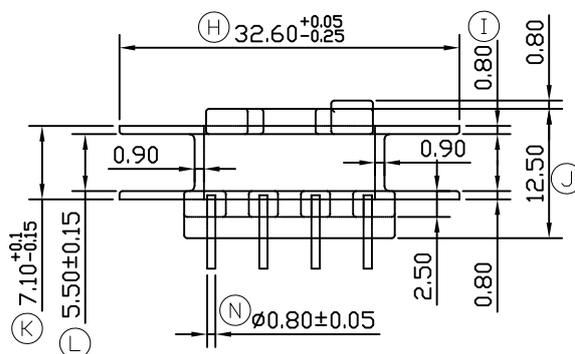


紅色線條位置是合模線

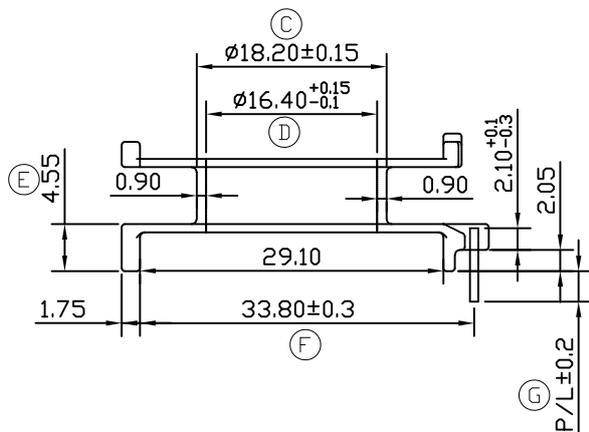

備註說明:

1. 強度要求: 1.8kg MIN
2. 耐壓要求: 4KV/1mA/3SEC
3. 焊錫溫度: 450° ± 10° 3SEC
4. PIN拉力: 焊前1.0kg MIN; 焊後1.5kg MIN
5. 模具狀況: 量產模

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	CC-4013 (4P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-4048	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ± 0.05					
		PIN TENSION LOAD 1.0 kg MIN		UL REC. : 94V0			
		TOLERANCE: 0 < L < 4: ± 0.1 4 < L < 16: ± 0.2 16 < L < 63: ± 0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: Jan 22 2025	