
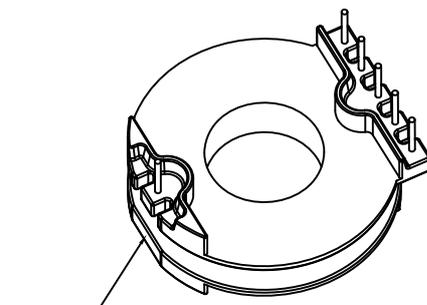
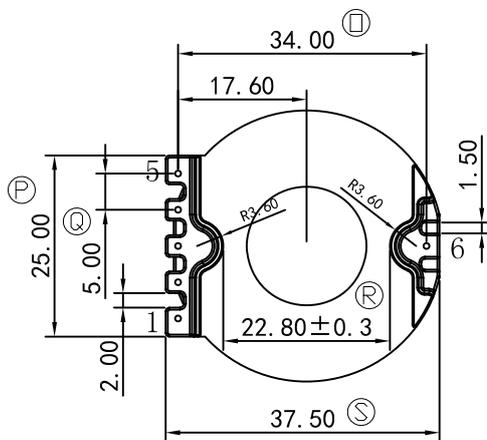

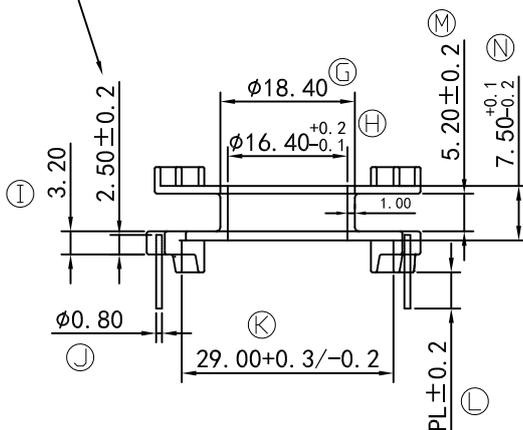


紅色線條位置是合模線

植PIN深度尺寸

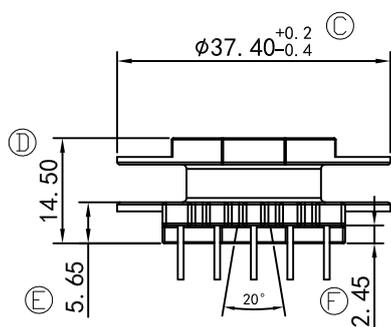

進膠口位置

備註說明:

1. 材質: PM-9630
2. 強度要求: 2.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 焊錫後拉力: 1.50kg MIN
6. 模具狀況: 樣品模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	CC-4514 (5+1P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-4509	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA ± 0.05

PIN TENSION LOAD 1.0 kg MIN UL REC. : 94V0

TOLERANCE: 0 < L < 4: ± 0.1 4 < L < 16: ± 0.2 16 < L < 63: ± 0.3

DRAWN & DRAFTED BY LIN HUA JING CHECKED & APPROVED BY DATE: MAY 26 2022