
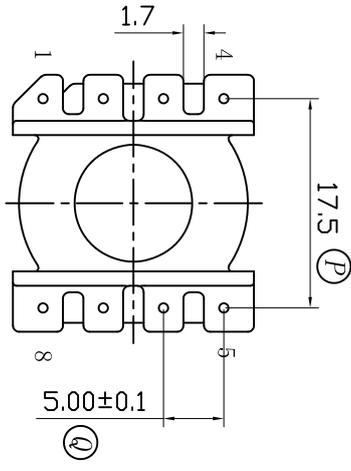
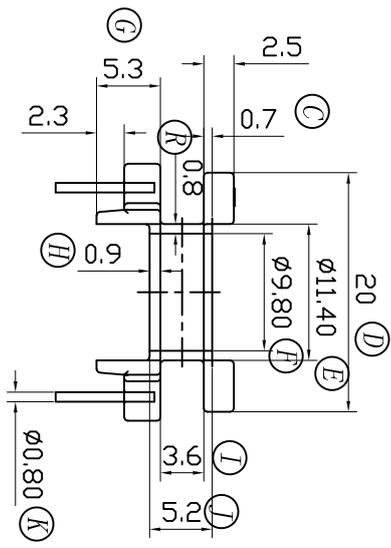
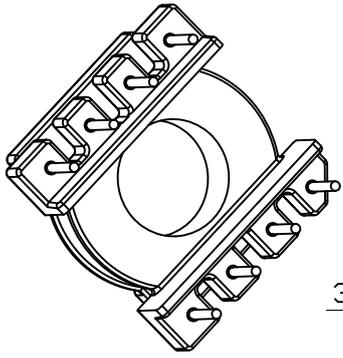
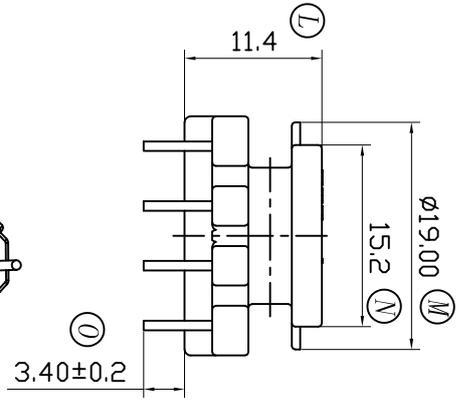
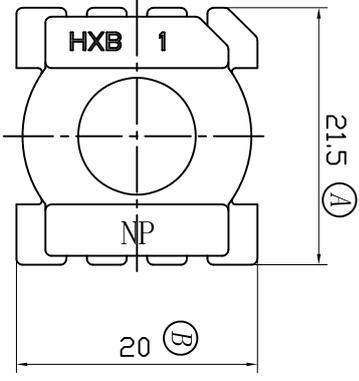


记号	日期	修改记录



NOTE:

1. 最小壁厚: 0.64mm
2. MATERIAL: PM-9823 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EC-2512
5. MATERIAL OF PIN : 3/4H CP WIRE,  $\phi 0.80 \pm 0.05$
6. 焊前拉力: 1.50kg Min; 焊后拉力: 2.0kg Min
7. TOLERANCES: (尺寸公差)

$0 < L < 1$	$\pm 0.06$
$1 < L < 4$	$\pm 0.10$
$4 < L < 16$	$\pm 0.15$
$16 < L < 63$	$\pm 0.20$



NAME	EC-2512 (8P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2533	PIN MATERIAL	WIRE CP	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司		DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.		TOLERANCE OF PIN DIA. ±0.05		UL REC.: 94V0	
TEL: 0769-86388188 FAX: 0769-86388111		E-Mail: hxbb@hxpj.com		TOLERANCE:		UL REC.: 94V0	
DRAWN & CHECKED BY: LIN HUA JING		DESIGNED BY: LIN GUO PING		DATE: AUG 19 2024			