

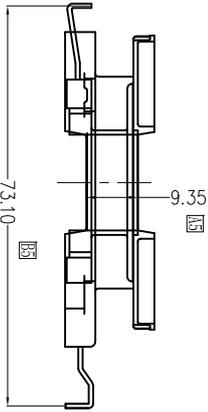
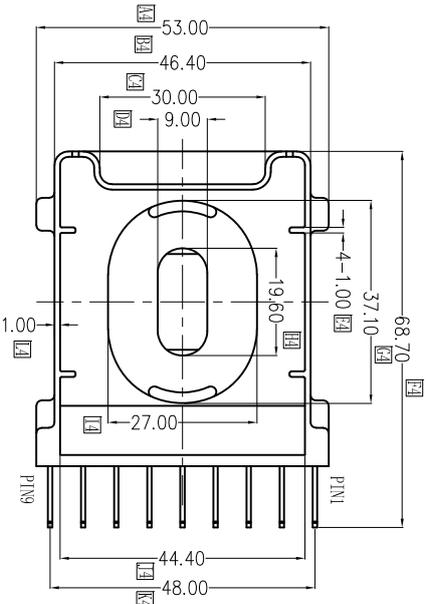
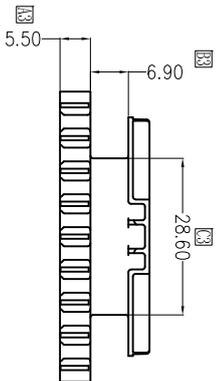
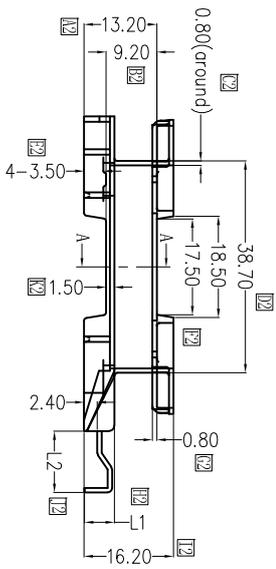


记号	日期	修改记录

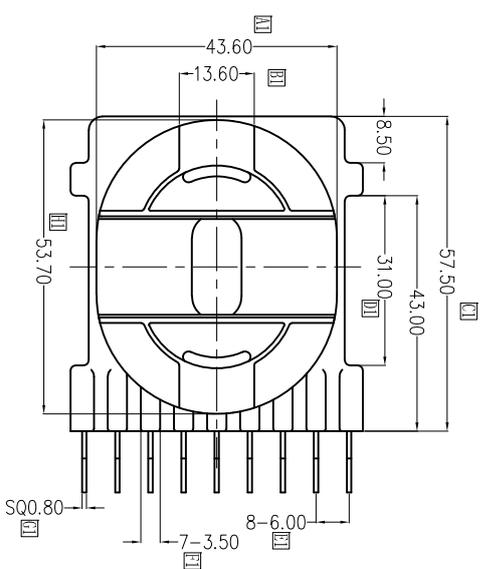

HX5305A与HX5305B组合后

尺寸公差:
 0<L≤1 ±0.06
 1<L≤4 ±0.10
 4<L≤16 ±0.15
 16<L≤63 ±0.20
 ANGULAR DIMS ± 1/2 DEG

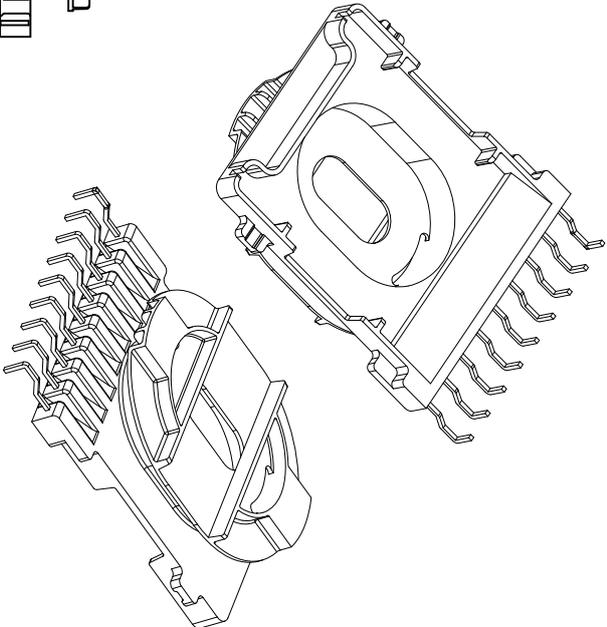

- NOTE:
1. 材质: PM9823 (UL94V-0, UL No. E41429)
 2. 颜色: 黑色
 3. 铁芯型号: ED5316
 4. PIN材质: 3/4H CP WIRE, 500.8±0.05mm
 5. 需符合超越《环境关联物质管理规范》
 6. 毛边最大为0.05mm
 7. Ⓜ 为主要尺寸, Ⓢ 为次要尺寸, 其他未标示尺寸为参考尺寸, Ⓜ 为主要尺寸, 1QC入料时需有检测记录, 共 36 个
 8. PIN拉力要求: 焊前1.5KG min 焊后2.0KG min
 9. 最小壁厚0.70mm以上



NAME	ED-5316(9P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 5305A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388188 FAX:0769-86388111 E-Mail:hxbohhb@vip.163.com		TOLERANCE OF PIN DIA ±0.03		TOLERANCE OF PIN TENSION LOAD 1.0 kg MIN		UL REC.:94Y0	
DESIGNED BY	LIN HUA JING	CHECKED BY	4L146:±0.2	16(L)<63±0.3		DATE: JAN 11 2022	