
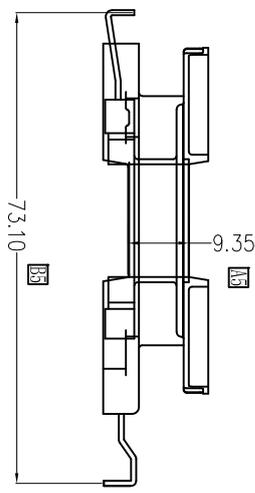
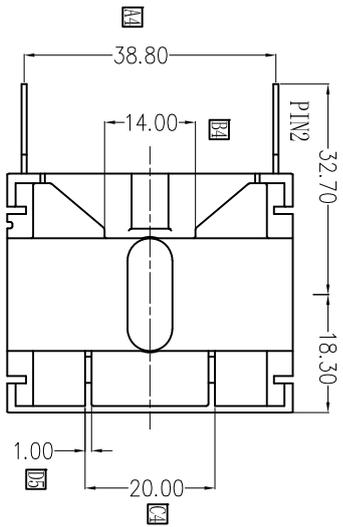
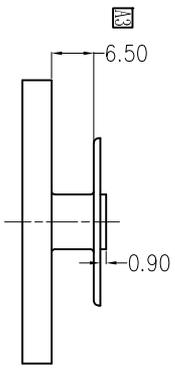
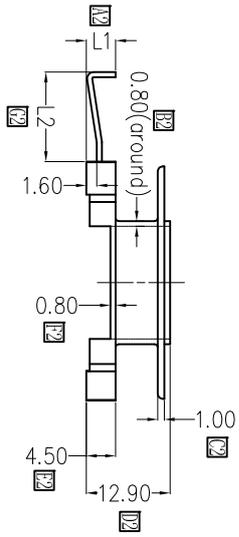




记号	日期	修改记录

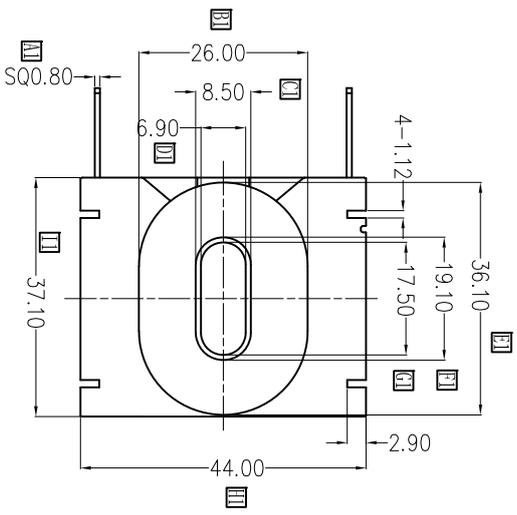

HX5305A与HX5305B组合后

尺寸公差表:  
 0<L≤1 ±0.06  
 1<L≤4 ±0.10  
 4<L≤16 ±0.15  
 16<L≤63 ±0.20  
 ANGULAR DIMS ± 1/2 DEG

- NOTE:
1. 材质: PM9823 (UL94V-0, UL No. E41429)
  2. 颜色: 黑色
  3. 铁芯型号: ED5316
  4. PIN材质: 3/4H CP WIRE, SQ0.8±0.05mm
  5. 需符合超越《环境关联物质管理规范》
  6. 毛边最大为0.05mm
  7. **[\*\*]** 为主要尺寸, **[\*\*]** 为次要尺寸, 其他未标示尺寸为参考尺寸, **[\*\*]** 主要尺寸, IQC入料时需有检测记录, 共 23 个
  8. PIN拉力要求: 焊前1.5KG min 焊后2.0KG min
  9. 最小壁厚0.70mm



NAME	ED-5316(2P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 5305B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.03		PIN TENSION LOAD 1.0 kg MIN		UL REC.: 94Y0	
DRAWN & CHECKED BY: LIN HUA JING		4/L: 4/6: ±0.2 16/L: 63: ±0.3		TOLERANCE: 0<L<4: ±0.1		DATE: JAN 11 2022	