


PIN咬花外露 (Textured exposed)
DETAIL B (3:1)

備註 (NOTE):

1. 材質 (Material): PM-9820
2. 強度要求 (Strength requirement): 2.80kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1Min
4. 焊錫溫度 (Soldering temperature): 450° ± 10° 3SEC
5. 拉力 (Pull): 焊後拉力 (After welding tension) 1.53kg MIN
6. 模具狀況 (The mould status): 正式模 (Formal mold)

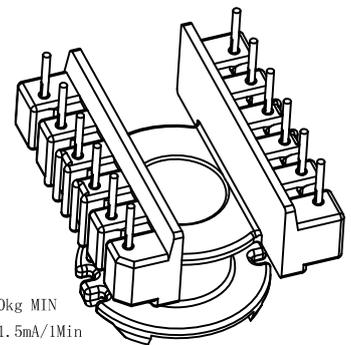

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
21.00	23.40	1.00	6.50	3.00	5.00	12.30	10.30	10.00	12.20	3.00	0.80	22.00	26.00	11.80	31.00	
±0.2	±0.3	±0.1	±0.2	±0.1	±0.1	±0.2	±0.1	±0.2	+0.05 -0.1	±0.2	±0.05	±0.2	±0.3	+0.2 -0.1	±0.3	

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	PIN外露咬花點寬度尺寸1.60改為2.00	2016/12/08	03		
02			04		

NAME	EER-28S (12P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2857	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN DIA ±0.05				TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		UL REC. :94V0		DATE: MAR 26 2015	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY			