

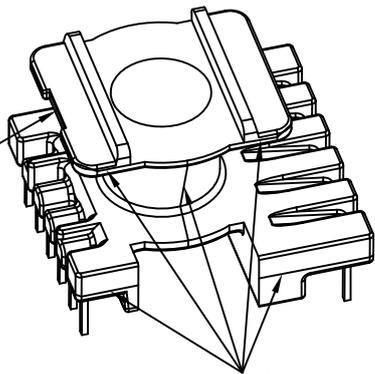
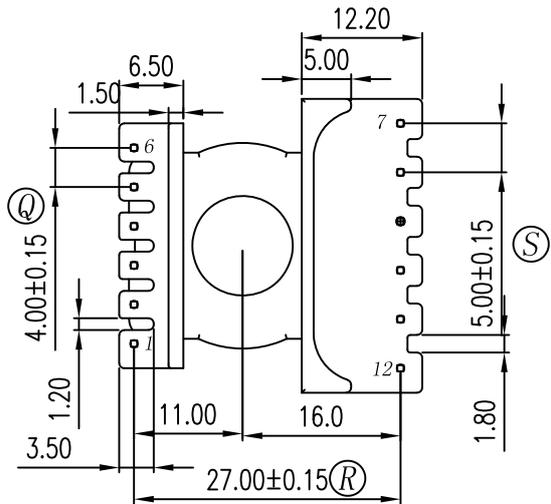
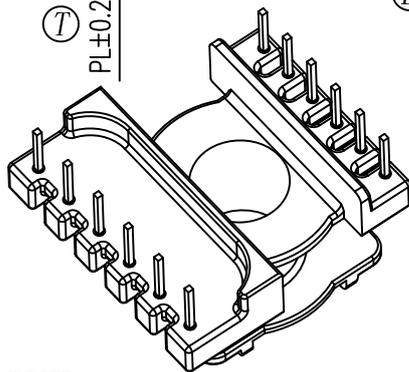
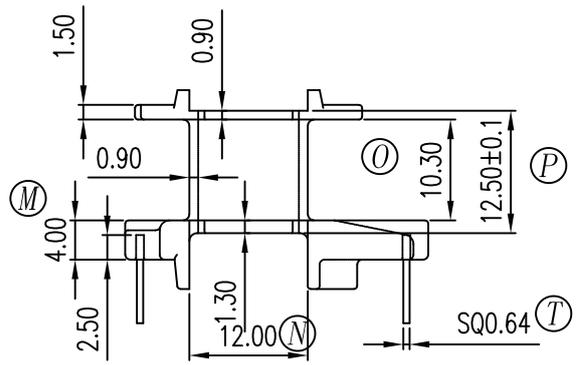


進膠口位置  
寬度4.00mm

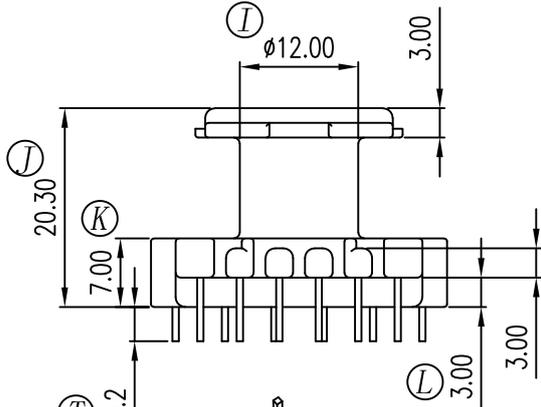

紅色線是合模線位置

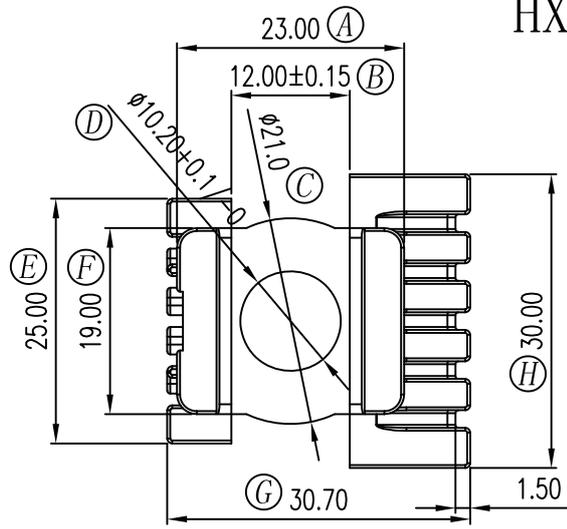

備註說明:

1. 材質: T375HF
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 樣品模

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
23.00	12.00	21.00	10.20	25.00	19.00	30.70	30.00	12.00	20.30	7.00	3.00	4.00	12.00	10.30	12.50
±0.3	±0.15	±0.3	+0.1 -0	±0.3	±0.3	±0.3	±0.3	±0.2	±0.3	±0.2	±0.1	±0.1	±0.2	±0.2	±0.1

Q	R	S	T	U
4.00	27.00	5.00	0.64	PL
±0.15	±0.15	±0.15	±0.05	±0.2

客户确认				RoHS HF
签回				

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EER-2822 (12P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2862	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC.: 94V0	
		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 07 2017	