
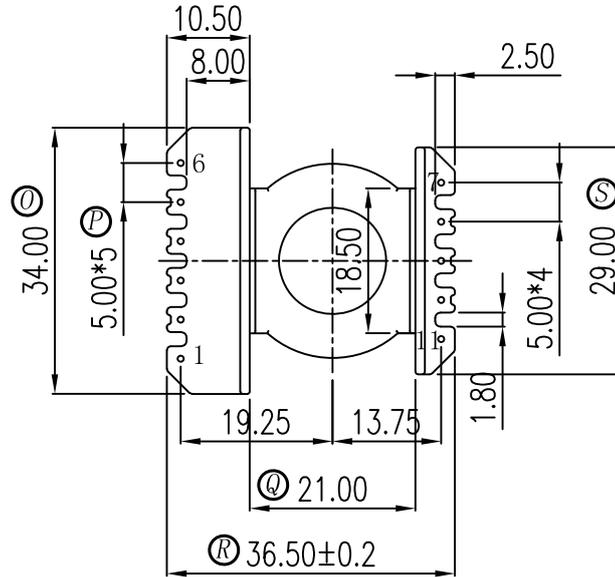
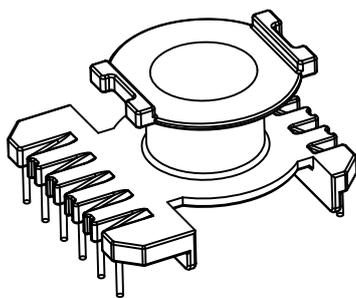

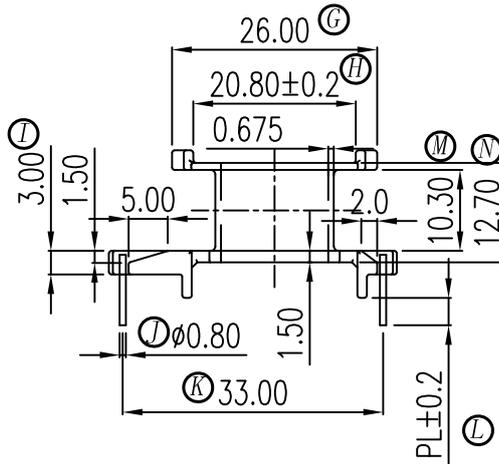
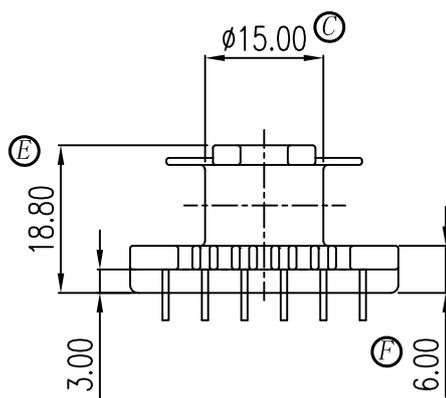
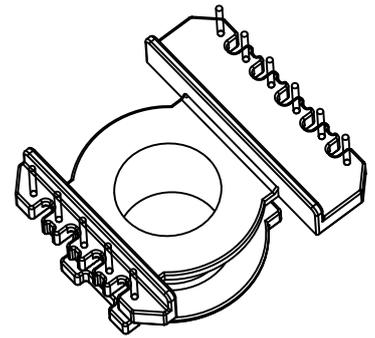


HX-3024

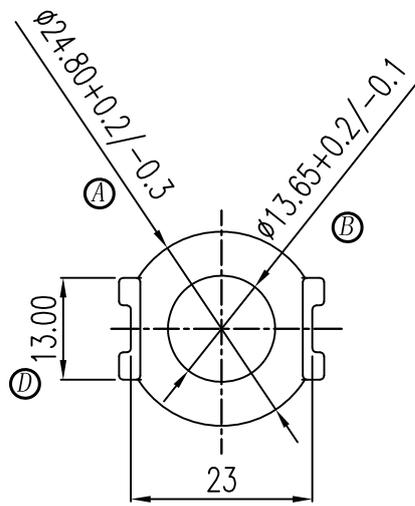

備註說明:

1. 模具狀況: 正式模
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|-----------------|------|-----|-----------------|------|
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| NAME | EER-3019(11P) | MATERIAL | PM-9820 | SCALE | 1/1 | ANGLE | $\pm 1^\circ$ |
|--------------------|---------------|--|---------|--|-----|-------------------|---------------|
| DRAWING NO. | HX 3024 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 00 |
| | | 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com | | TOLERANCE OF PIN DIA ± 0.05 PIN TENSION LOAD 1.0 kg MIN TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$ | | UL REC. :94V0 | |
| DRAWN & DRAFTED BY | | LIN HUA JING | | CHECKED & APPROVED BY | | DATE: OCT 26 2012 | |