

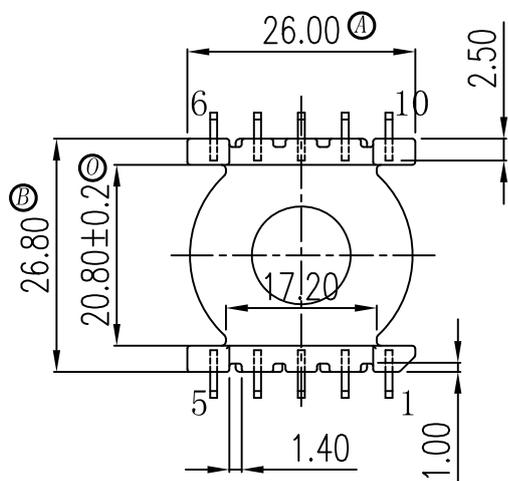
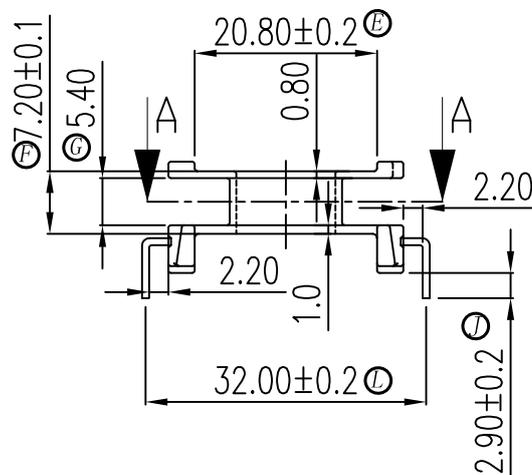


A-A (1:1)

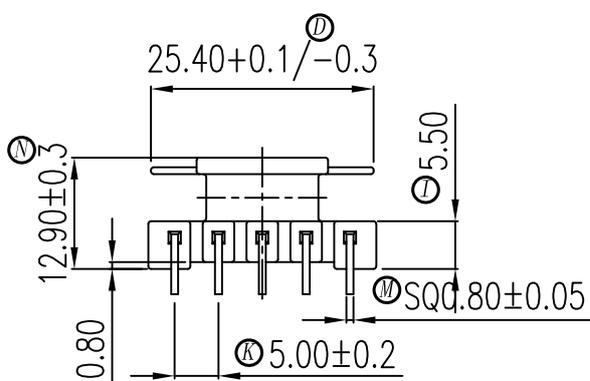

備註說明:

1. 材質: PF-2736
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.50kg MIN
6. 模具狀況: 正式模

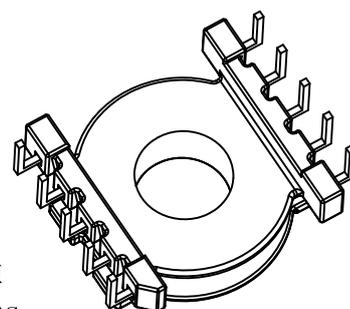

客户确认  
签回

RoHS  
HF

|      |                 |      |     |                 |      |
|------|-----------------|------|-----|-----------------|------|
| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
| 01   |                 |      | 03  |                 |      |
| 02   |                 |      | 04  |                 |      |

|  |                |                             |         |   |     |                   |     |
|--|----------------|-----------------------------|---------|---|-----|-------------------|-----|
| NAME   | EER-3013N(10P) | MATERIAL                    | PF-2736 | SCALE   | 1/1 | ANGLE             | ±1° |
| DRAWING NO.  | HX-3035        | PIN MATERIAL                | CP WIRE | UNIT  | m/m | REV.              | 00  |
| 东莞市华欣塑胶制品有限公司<br>DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.<br>TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111<br>http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com |                | TOLERANCE OF PIN DIA ±0.05  |         |   |     | UL REC. :94V0     |     |
|  |                | PIN TENSION LOAD 1.0 kg MIN |         | TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 |     |                   |     |
| DRAWN & DRAFTED BY   |                | LIN HUA JING                |         | CHECKED & APPROVED BY                             |     | DATE: SEP 27 2014 |     |