
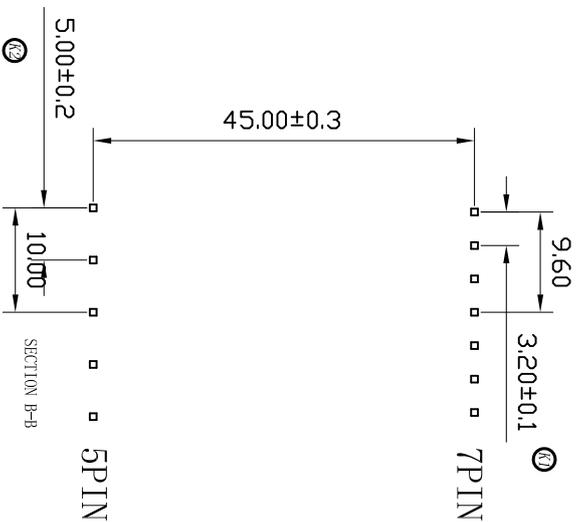
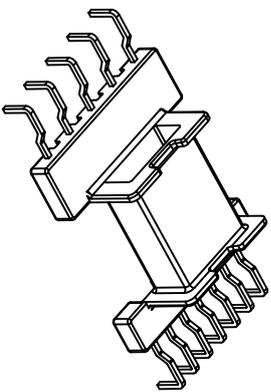

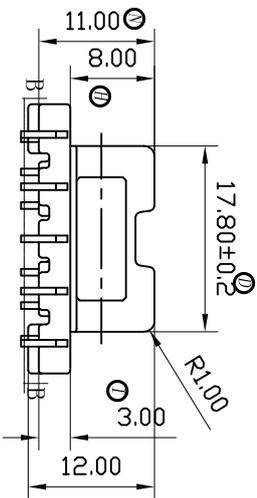
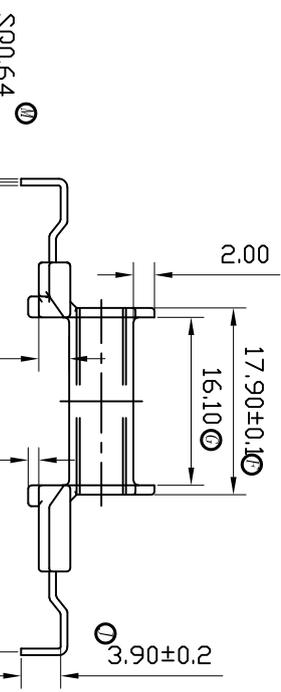


记号	日期	修改记录

- 備註說明:
1. 材質: PM-9820
 2. 強度要求: 1.50kg MIN
 3. 耐壓要求: 4KV/1.5mA/1分鐘
 4. 焊錫溫度: 450° ±10° 3SEC
 5. 拉力: 焊後拉力 1.5kg MIN
 6. 模具狀況: 正式模

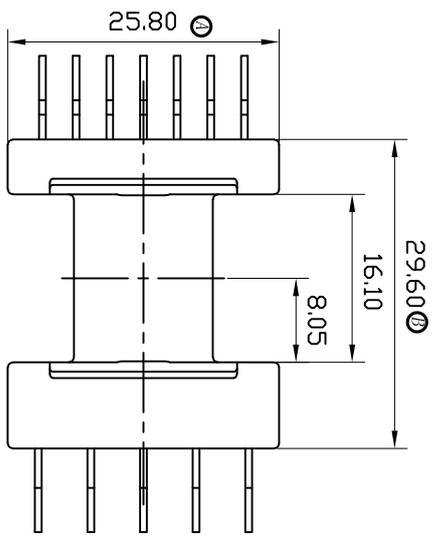

RoHS
HF

NAME	EFD-2525 (12P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2531A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
TOLERANCE OF PIN DIA. ±0.05		PIN TENSION LOAD 1.0 kg MIN		UL REC.: 94V0		TOLERANCE: 0<L<4±0.1 4<L<16±0.2 16<L<63±0.3	
DRAWN & CHECKED BY: LIN HUA JING		APPROVED BY: LIN GUO PING		DATE: JUL 10 2014		DONGGUAN HUANLIAN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.huanliandp.com E-Mail: hlxh000@huanliandp.com	

东莞市华欣塑胶制品有限公司
DONGGUAN HUANLIAN PLASTIC MANUFACTURING PRODUCTS CO., LTD.