

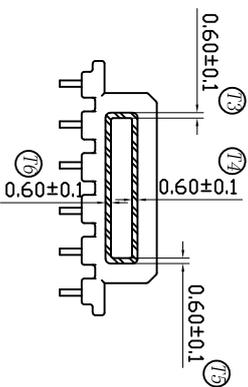


记号	日期	修改记录

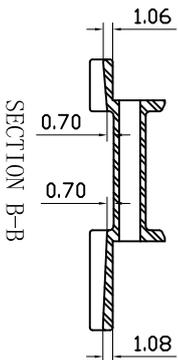



SECTION A-A

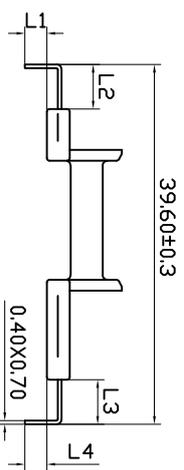

备注：第二种PIN长规格


1. L1=2.40±0.5, L2=4.90±0.15

2. L1=L4, L2=L3





NOTE:

1. PART NO. :
2. MATERIAL : PM-9820 MUST MEET UL94V-0
3. COLOR : BLACK
4. CORE TYPE : EFD-27.5
5. MATERIAL OF PIN : 3/4H CP WIRE, 0.40X0.70±0.05
6. TOLERANCES : (尺寸公差)

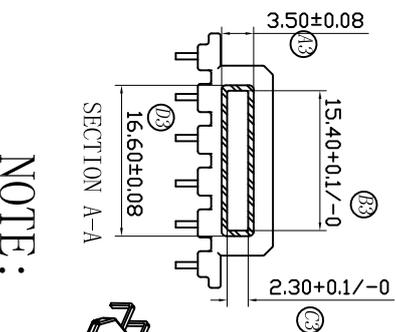


SECTION A-A

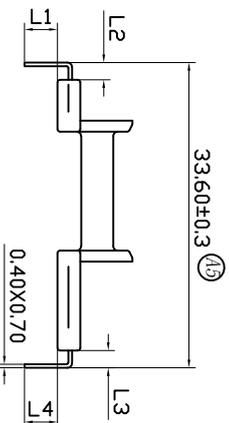

备注：第一种PIN长规格

1. L1=3.60±0.3, L2=1.90±0.15

2. L1=L4, L2=L3

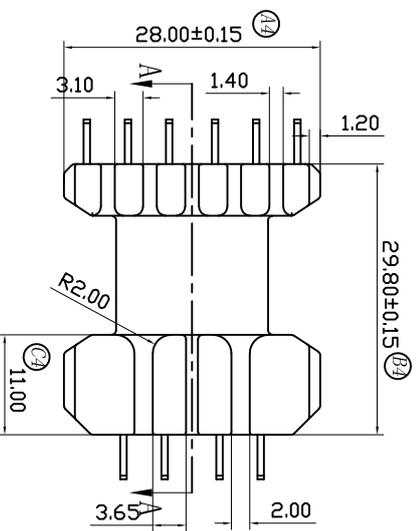

NAME	EFD-27.5(10P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2702	PIN MATERIAL	WIRE CP	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司		DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.		TOLERANCE OF PIN DIA. ±0.05		UL REC.: 94V0	
TEL: 0769-86388188 FAX: 0769-86388111		E-Mail: hxbobbin@vip.163.com		PIN TENSION LOAD 1.5 kg/MIN		TOLERANCE:	
DRAWN & CHECKED BY LIN HUA JING		APPROVED BY LIN GUO PING		DATE: OCT 27 2010			