


平贴度0.20mm MAX

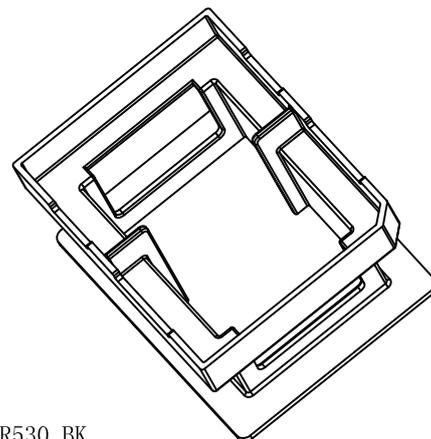

備註說明:

1. 材質: PET-FR530, BK
2. 強度要求: 2.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: $320^{\circ} \pm 10^{\circ}$ 3SEC
5. 與HX-3710A裝配
6. 模具狀況: 量產模

客户确认
签回

RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EFD-3707B	MATERIAL	FR530 BK	SCALE	1:1	ANGLE	$\pm 1^{\circ}$
DRAWING NO.	HX-3710B	PIN MATERIAL		UNIT	m/m	REV.	00



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA ± 0.05

PIN TENSION LOAD kg MIN UL REC. : 94V0

TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$

DRAWN & DRAFTED BY LIN HUA JING CHECKED & APPROVED BY DATE: MAY 22 2024