

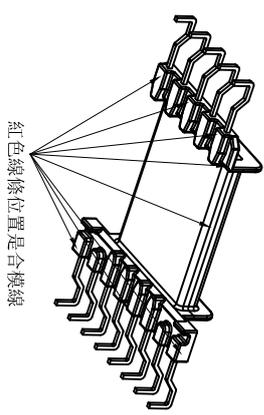
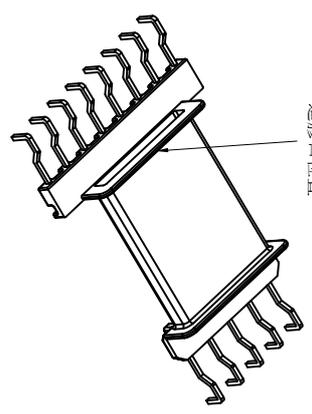
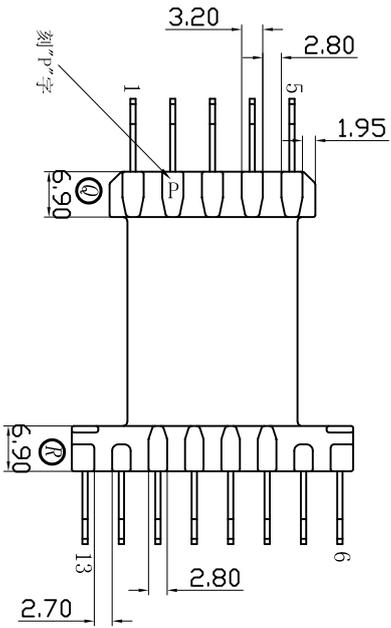

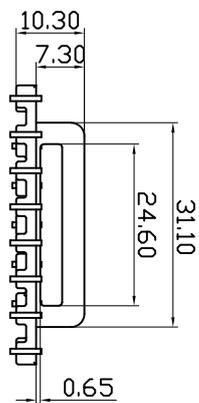
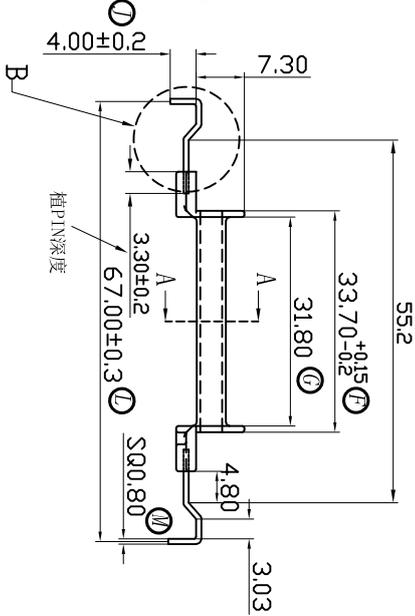
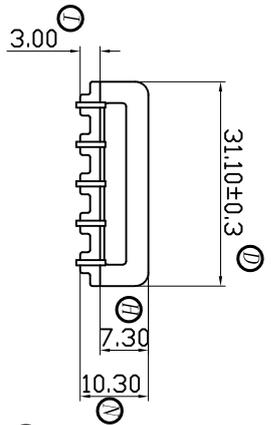


记号	日期	修改记录

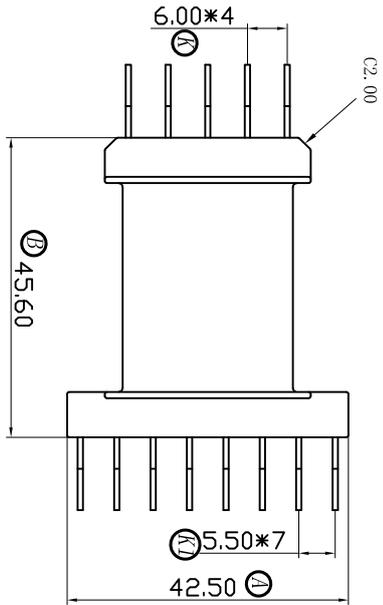

- 備註說明:
1. 材質: PM-9820
 2. 強度要求: 1.50kg MIN
 3. 耐壓要求: 4KV/1.5mA/1分鐘
 4. 焊錫溫度: 450° ±10° 3SSEC
 5. 拉力: 焊後1.5kg MIN
 6. 模具狀況: 量產模

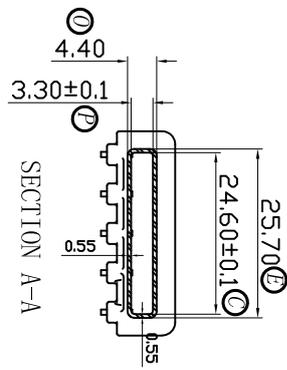

NAME	EFD-4549 (13P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-4503A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
TOLERANCE OF PIN DIA. ±0.03		PIN TENSION LOAD 1.0 kg MIN		UL REC.: 94V0		TOLERANCE: 0<K<4±0.1 4<K<16±0.2 16<K<63±0.3	
DRAWN & CHECKED BY: LIN HUA JING		DESIGNED BY: LIN HUA JING		APPROVED BY: LIN HUA JING		DATE: NOV 02 2010	

东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL.: 0769-86388188 FAX: 0769-86388111
E-Mail: hxbobbin@vip.163.com