
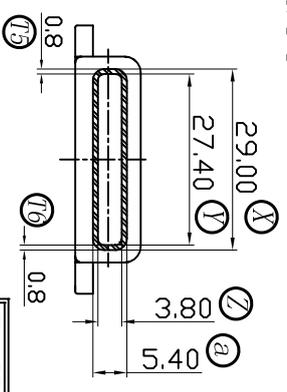

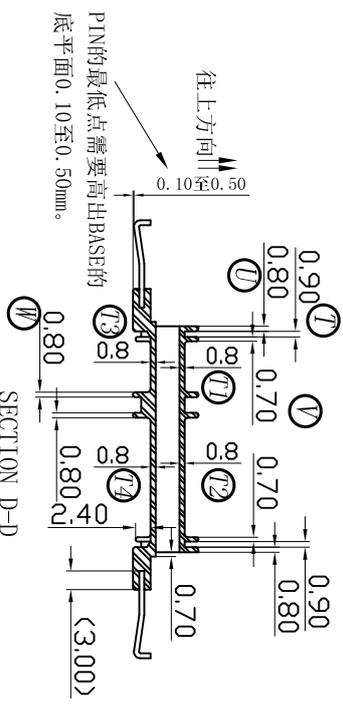
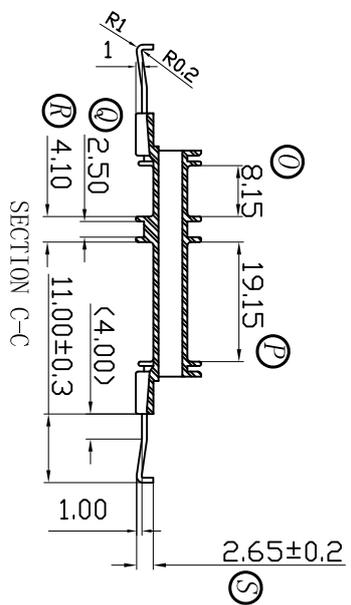
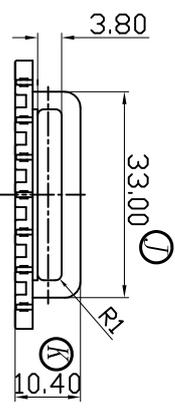
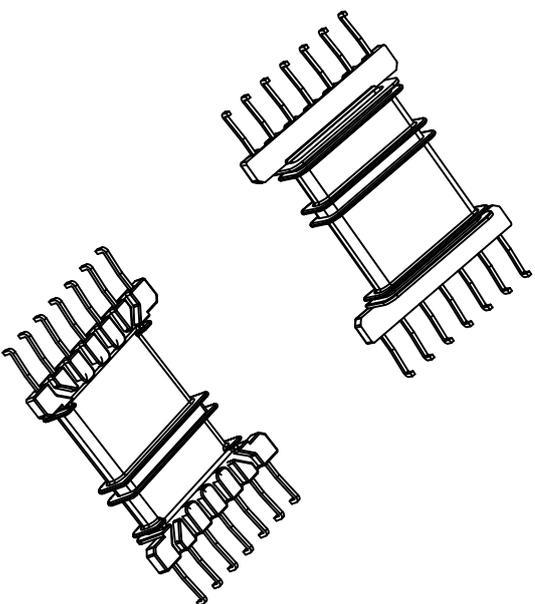
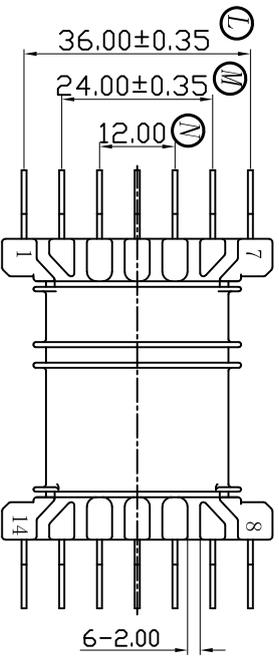
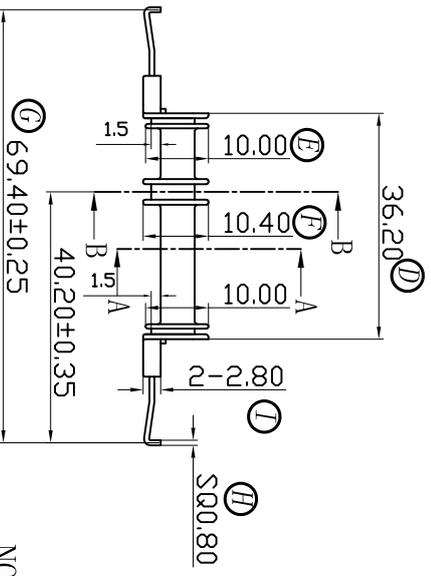


记号	日期	修改记录
1	2011/02/22	1. G, S尺寸由69.40±0.35, 2.80±0.2改为69.40±0.25, 2.65±0.2. 2. PIN的最低点需要高出BASE的底平面0.10至0.50mm。

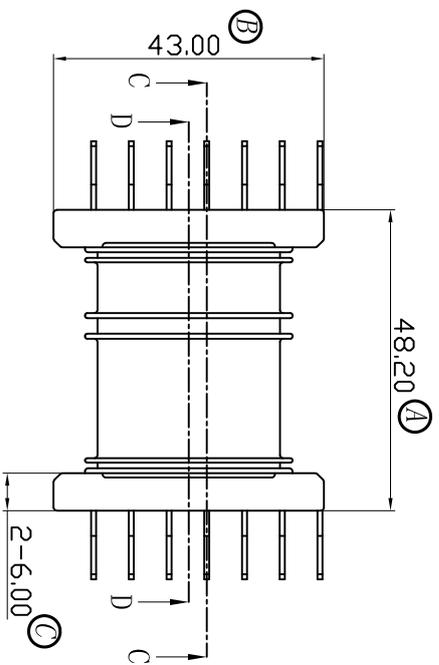

- NOTE:
1. 半成品与HX4601A共用
  2. PART NO. :
  3. MATERIAL: PM-9820 MUST MEET UL94V-0
  4. COLOR: BLACK
  5. CORE TYPE: EFD46
  6. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05
  7. TOLERANCES: (尺寸公差)

0<L≤4	±0.1
4<L≤16	±0.15
16<L≤64	±0.2
L>64	±0.3

NAME	EFD-4651 (14P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	45°
DRAWING NO.	HX 4602A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
TOLERANCE OF PIN DIA. ±0.05		PIN TENSION LOAD 1.5 KG/MIN		UL REC.: 94V0			
TOLERANCE:							
DRAWN & CHECKED BY: LIN HUA JING		DESIGNED & APPROVED BY: LIN GUO PING		DATE: FEB 22 2011			



**东莞市华欣塑胶制品有限公司**  
 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.  
 TEL: 0769-86388188 FAX: 0769-86388111  
 E-Mail: hxbohhind@vip.163.com