

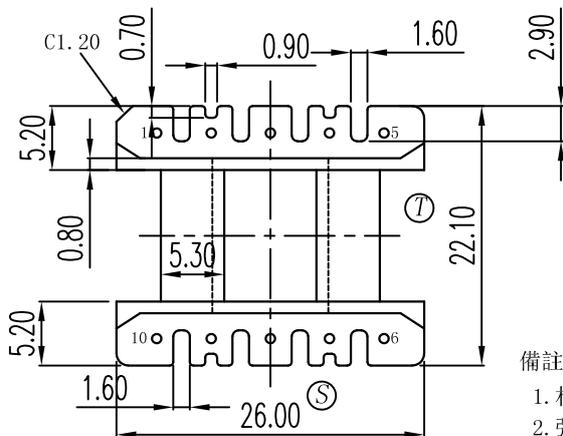
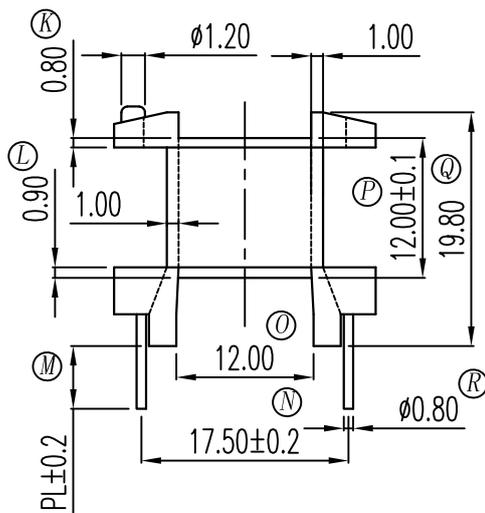
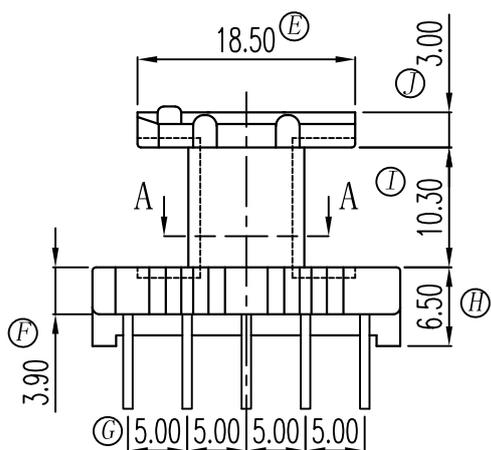


SECTION A-A

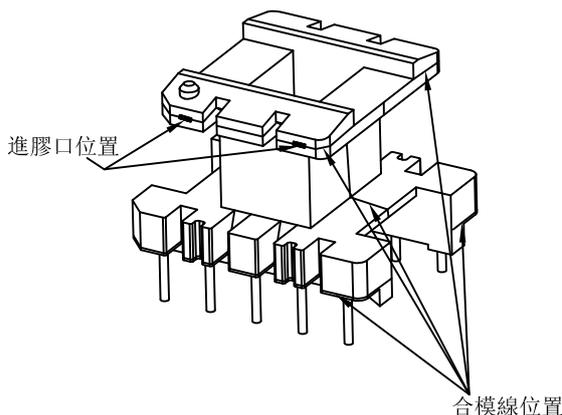

備註 (NOTE):

1. 材質: T375HF
2. 強度要求: 1.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1Min
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊後拉力: 1.50kg MIN
6. 模具狀況: 量產模

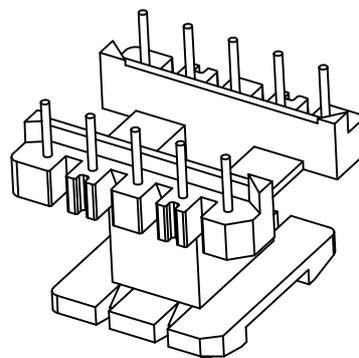

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EI-28 (10P)	MATERIAL	T375HF	SCALE	1.5:1	ANGLE	±1°
DRAWING NO.	HX 2807	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA	±0.05	
PIN TENSION LOAD	1.5 kg MIN	UL REC. :94V0
TOLERANCE:	0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:	JUN 07 2004	