

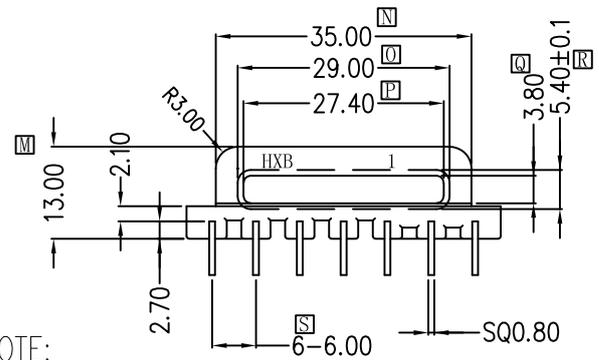


料號10E500000D, PIN1, 3, 5, 9CUT L=5.0±0.2

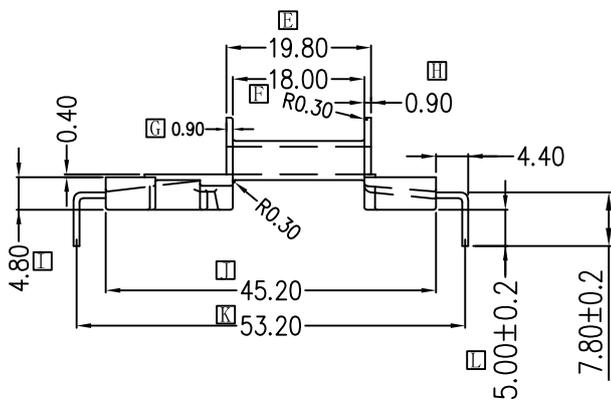

NOTE:

1. 材质：PM-9820 (UL94V-0, UL No.E41429)
2. 颜色：黑色
3. 铁芯型号：EM50
4. PIN材质：3/4H CP WIRE, SQ0.8±0.02mm
5. 所有未标注圆角为0.2R MAX
6. 毛边最大为0.05mm
7. ** 为主要尺寸, ⊕ 为次要尺寸, 其他未标示尺寸为参考尺寸, ** 主要尺寸, IQC入料时需有检测记录
8. BOBBIN最小壁厚为: 0.64mm MIN
9. 尺寸公差:
 $0 < L \leq 1 \quad \pm 0.06$
 $1 < L \leq 4 \quad \pm 0.1$
 $4 < L \leq 16 \quad \pm 0.15$
 $16 < L \leq 63 \quad \pm 0.2$

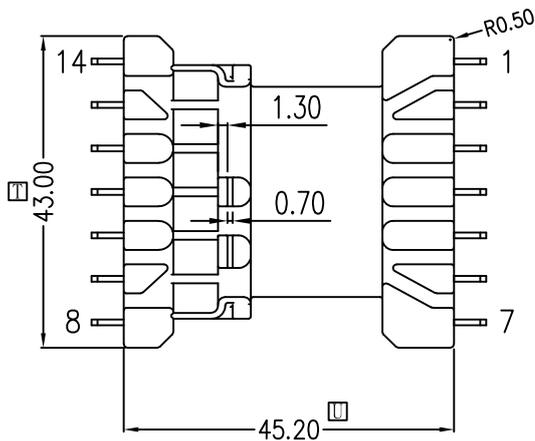

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|---|------------|-----|-----------------|------|
| 01 | 1. E, G, H尺寸由19.60, 0.80, 0.80改为19.80, 0.90, 0.90 | 2013/04/10 | 03 | | |
| 02 | | | 04 | | |

| NAME | EM-50 (14P) | MATERIAL | PM-9820 | SCALE | 1:1 | ANGLE | ±1° |
|---|--------------|-----------------------------|---------|---------------|-------------|-------|-----|
| DRAWING NO. | HX 5006 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 01 |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com | | TOLERANCE OF PIN DIA ±0.05 | | UL REC. :94V0 | | | |
| | | PIN TENSION LOAD 1.5 kg MIN | | | | | |
| DRAWN & DRAFTED BY | LIN HUA JING | CHECKED & APPROVED BY | | DATE: | DEC 01 2012 | | |