


Detail:A
SCALE 2:1

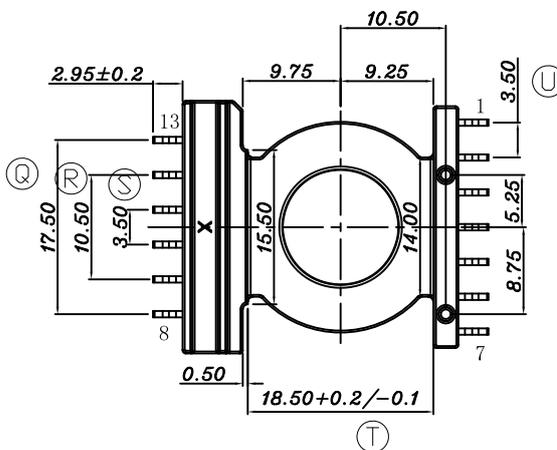

備註說明:

1. 材質: PM-9630
2. 拉力: 焊前是1.0kg MIN, 焊後是1.5kg MIN
3. PIN平貼度: 焊前是0.10mm MAX, 焊後是0.12mm MAX
4. 耐壓要求: 4KV/1.5mA/1分鐘
5. 焊錫溫度: 450° ± 10° 3SEC
6. 強度要求: 2.0kg MIN;
7. 模具狀況: 量產模

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|-----------------|------|-----|-----------------|------|
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| NAME | EQ-25-12.4(6+7P) | MATERIAL | PM-9630 | SCALE | 1:1 | ANGLE | ± 1° |
|--|------------------|---|---------|-----------------------|-----|-------------------|------|
| DRAWING NO. | HX 2559 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 00 |
| | | TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN | | | | | |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com | | TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 | | UL REC.: 94V0 | | | |
| DRAWN & DRAFTED BY | | LIN HUA JING | | CHECKED & APPROVED BY | | DATE: JUN 26 2021 | |