


備註說明:

1. PART NO. : HX 2853 樣品模
2. MATERIAL: PM-9820 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: ER-2812V
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.64±0.05
6. DIMENSION MARK :  $\triangle$  MAIN DIM.  $\otimes$  SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. .  
 标示的  $\triangle$  为重要尺寸, 标示的  $\otimes$  为次要尺寸.
7. 強度要求: 1.50kg MIN
8. 耐壓要求: 4KV/1.5mA/1分鐘
9. 焊錫溫度: 450° ±10° 3SEC
10. 拉力: 焊後拉力 2.0kg MIN

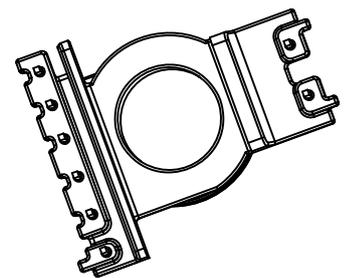

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ER-2812V (8P)	MATERIAL	PM-9820	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX 2853	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: SEP 25 2014	