
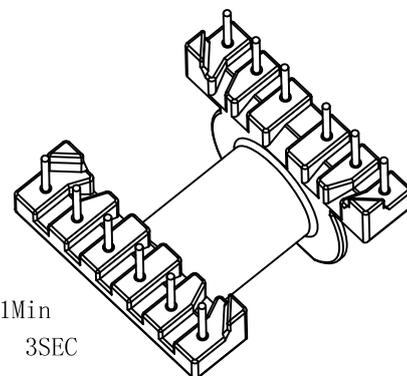
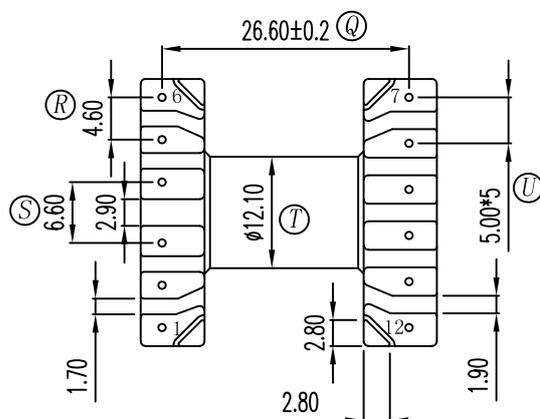


植PIN深度尺寸

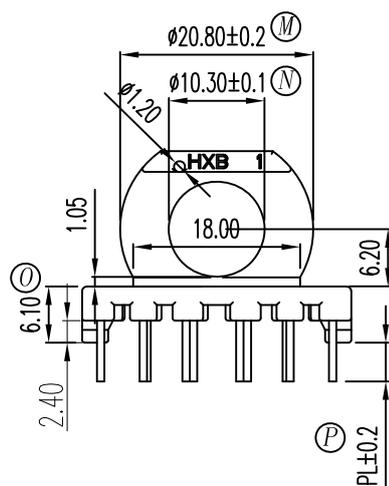

備註 (NOTE):

1. 材質: T375HF
2. 強度要求: 2.0kg MIN
3. 耐壓要求: 4KV/1.5mA/1Min
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊後拉力: 1.50kg MIN
6. 模具狀況: 量產模

R	S	T	U
4.60	6.60	12.10	5.00
±0.2	±0.2	±0.2	±0.2

客户确认
签回



A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
29.00	31.90	6.87	7.88	21.10	18.85	17.15	0.85	3.70	0.80	12.40	20.80	20.80	10.30	6.10		26.60
±0.3	±0.3	±0.2	±0.2	±0.3	±0.1	±0.3	±0.15	±0.1	±0.05	±0.2	±0.3	±0.2	±0.1	±0.2		±0.2

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	I尺寸4.00改為3.70, L尺寸21.30改為20.80, O尺寸6.60改為6.10, 凸點高度2.60改為2.40	2018/12/05	03		
02			04		

NAME	ER-2828 (12P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2860	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DATE: JUN 30 2016	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: JUN 30 2016	