
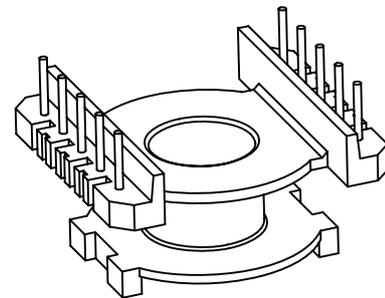
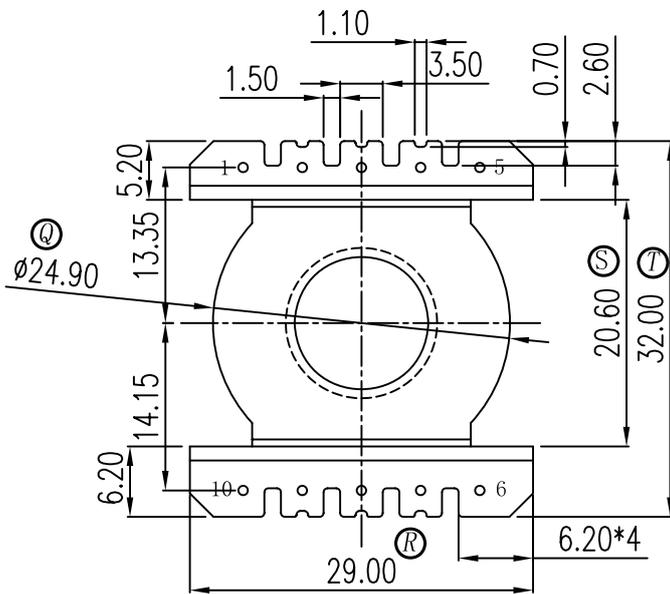
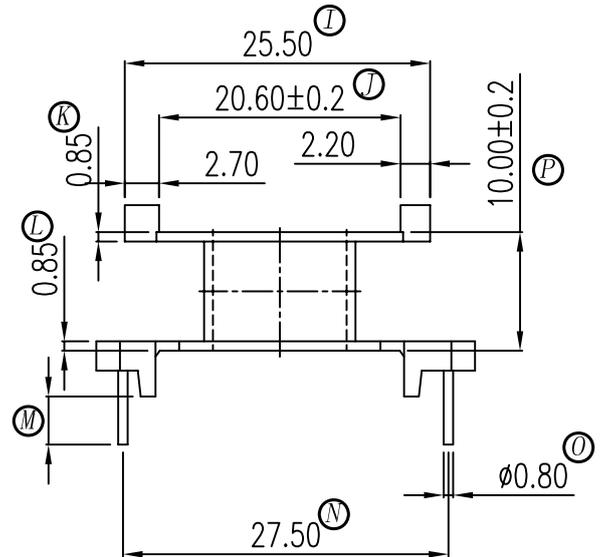
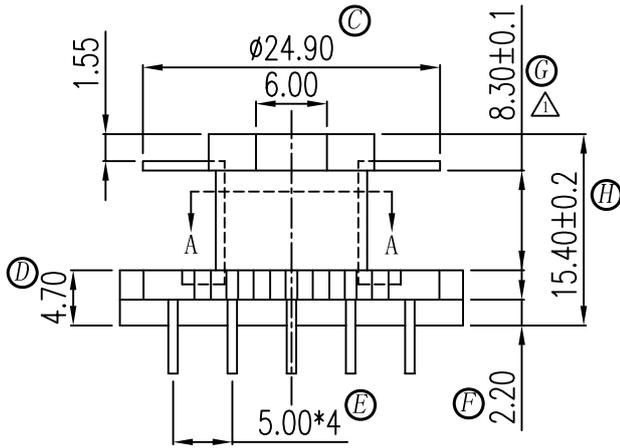


SECTION A-A

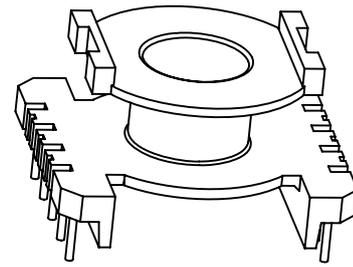


备注: 1. 带有△符号的尺寸是成型要X-R图统计。
2. 带有△符号的尺寸是插针要X-R图统计。

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. J尺寸由20.40+0.3/-0.1改为20.60±0.2	2009/05/07	03	D尺寸5.50改为4.70, F尺寸2.50改为2.20, H尺寸16.20改为15.40	2016/05/12
02	1. P尺寸10.00mm的公差±0.1改为±0.2, 增加叶片强度.	2010/07/27	04		

NAME	ER-3016(10P)	MATERIAL	PM-9820	SCALE	1.5/1	ANGLE	±1°
DRAWING NO.	HX 3004	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	C
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD 1.0 kg MIN				UL REC.: 94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: SEP 02 2008	