
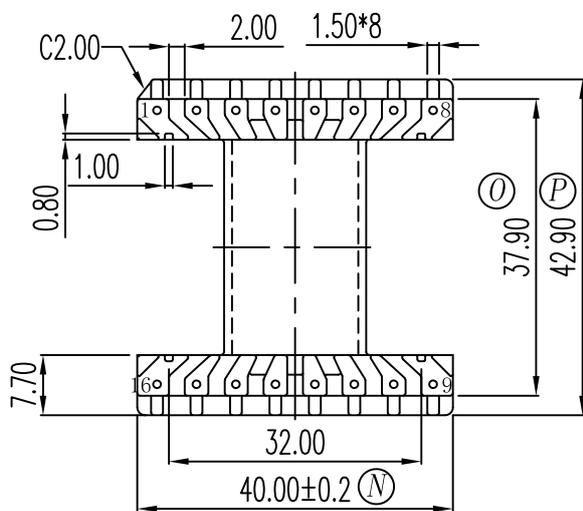
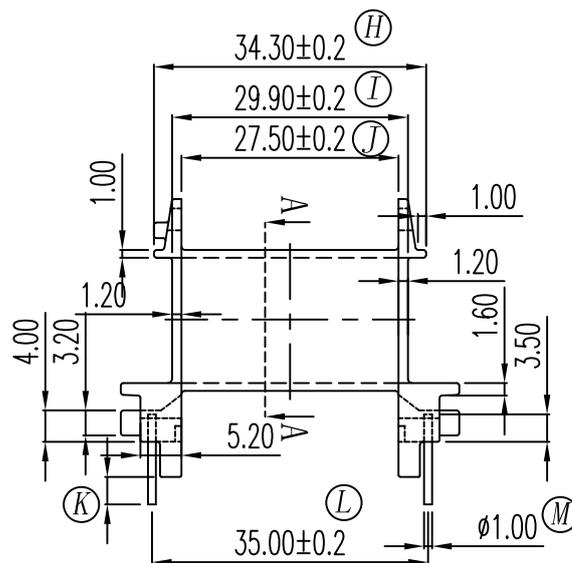
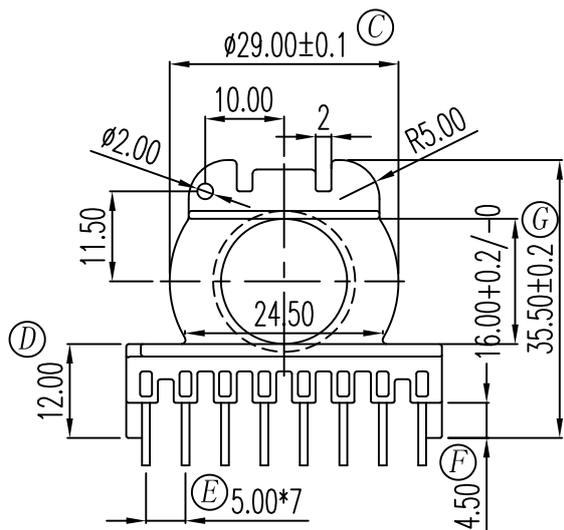


SECTION A-A

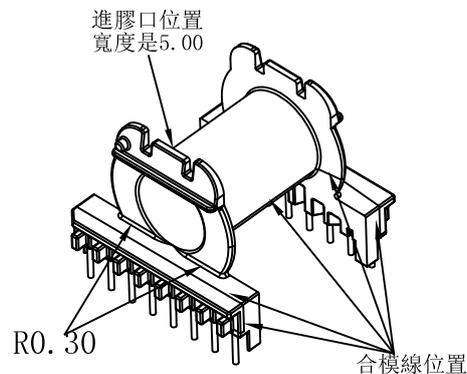

四個凸點C角0.50

備註說明

1. 材質要求: T375HF
2. 強度要求: 2.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 2.0kg MIN
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
16.00	18.00	29.00	12.00	5.00	4.50	35.50	34.30	29.90	27.50		35.00	1.00	40.00	37.90	42.90
+0.2 -0	±0.3	±0.1	±0.2	±0.2	±0.2	±0.2	±0.2	±0.2	±0.2		±0.2	±0.05	±0.2	±0.3	±0.3

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	BASE底部凸點加C角0.50mm增加強度	2015/03/25	03		
02	BASE台旁邊缺口填平	2017/07/10	04		

NAME	ERL-42 (16P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 4204	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	02
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05		— ⊕ —		UL REC. :94V0	
		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY	
		LIN HUA JING		CHECKED & APPROVED BY			