
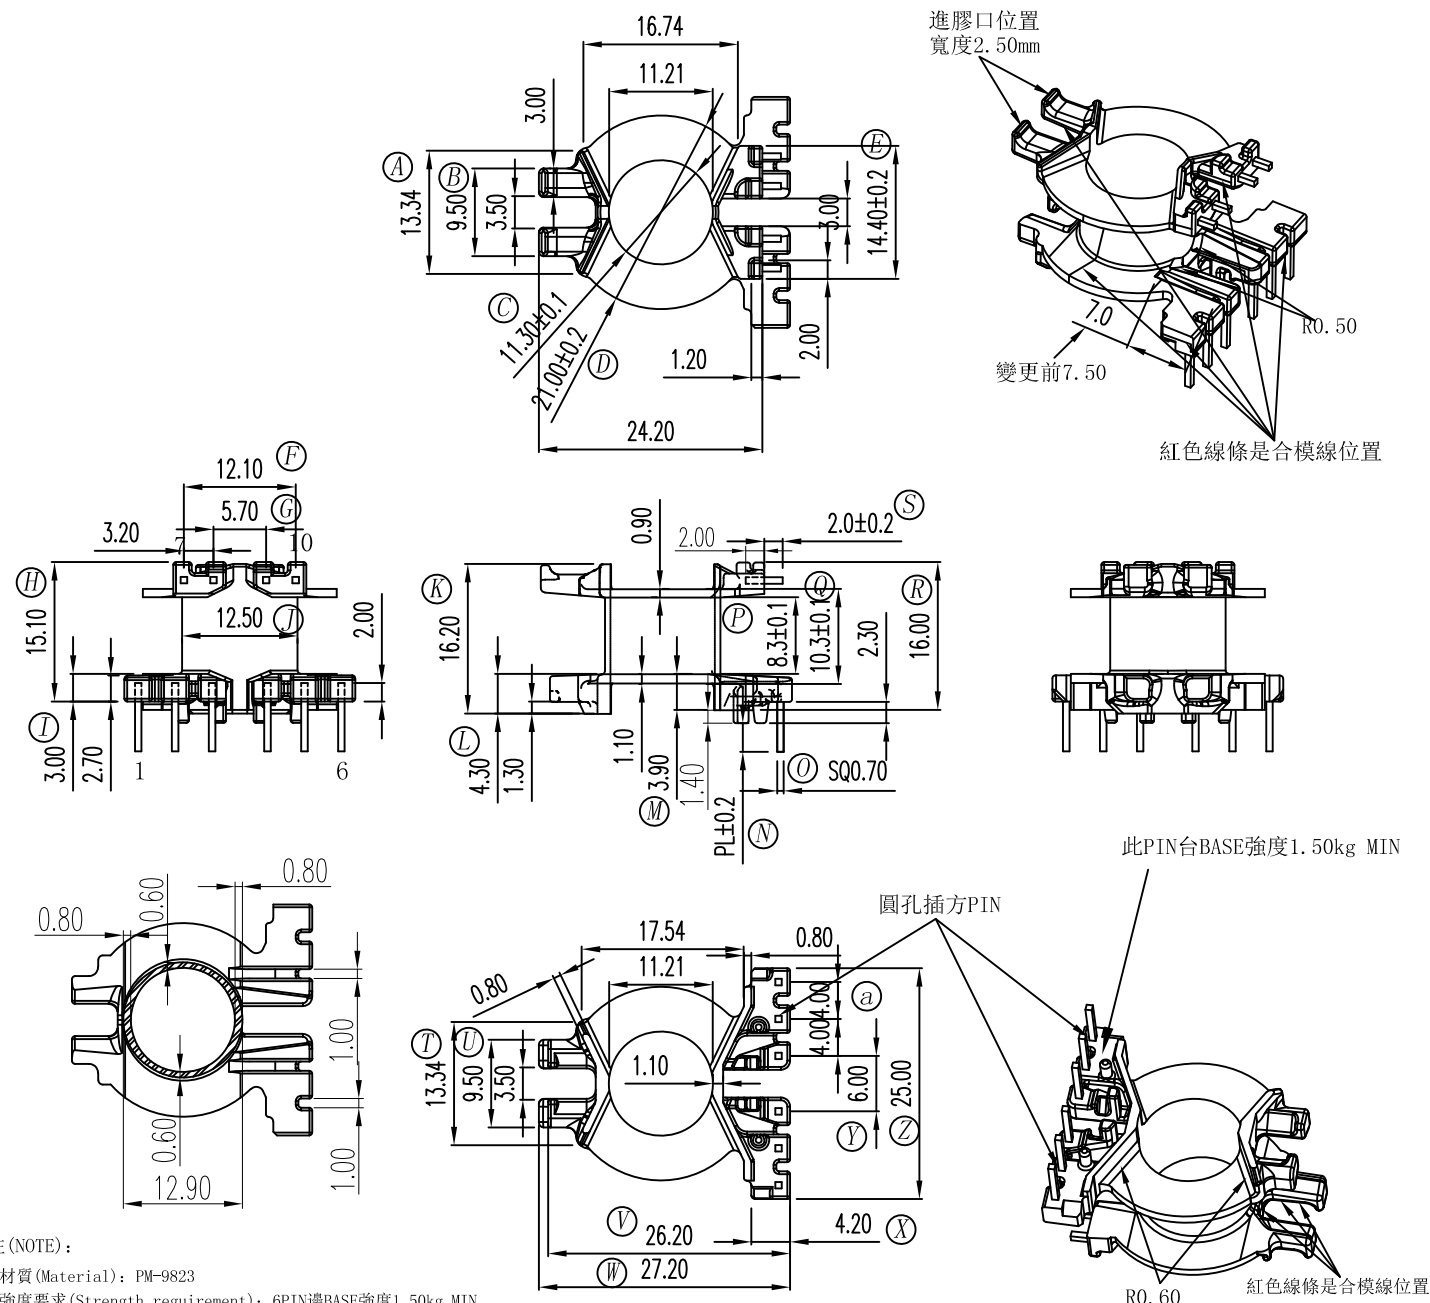




備註 (NOTE):

1. 材質 (Material): PM-9823
2. 強度要求 (Strength requirement): 6PIN邊BASE強度1.50kg MIN, 其他位置1.50kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1Min
4. 焊錫溫度 (Soldering temperature): 450° ±10° 3SEC
5. 拉力 (Pull): 焊後拉力 (After welding tension) 1.50kg MIN
6. 模具狀況 (The mould status): 量產模 (Formal mold)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	客户确认 签回 RoHS HF			
13.34	9.50	11.30	21.00	14.40	12.10	5.70	15.10	3.00	12.50	16.20	4.30	3.90	PL	0.70	8.30	10.30				
±0.2	±0.2	±0.1	±0.2	±0.2	±0.2	±0.2	±0.2	±0.1	±0.2	±0.3	±0.2	±0.1	±0.2	±0.05	±0.1	±0.1				
REV.		REVISION RECORD										DATE		REV		REVISION RECORD			DATE	
01														03						
02														04						

NAME	LQ-25B (6+4P)	MATERIAL	PM-9823	SCALE	1 : 1	ANGLE	± 1 °	
DRAWING NO.	HX-2553	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00	
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com			TOLERANCE OF PIN DIA ±0.05					
			PIN TENSION LOAD kg MIN			UL REC. : 94V0		
			TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
			DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY	