



此部位強度1.5kg MIN

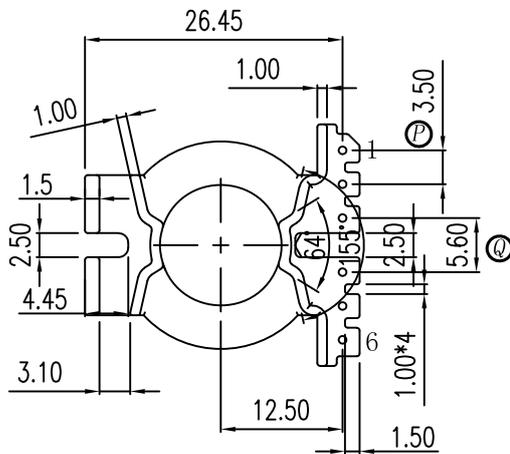

備註說明:

1. 材質: PM-9823
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模
7. HX-2617A與HX-2617B匹配OK
8. PIN來回90° 彎折一次無折斷, 無龜裂

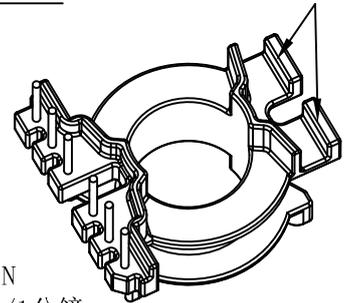

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
28.20	14.50	25.00	14.10	12.50	8.75	5.50	3.80	6.00	3.30	21.50	15.95	5.50	0.80	6.85	3.50	5.60
±0.3	±0.15	±0.3	±0.2	+0.2/-0.1	+0.1/-0.3	±0.2	±0.1	±0.2	±0.1	±0.3	±0.2	±0.2	±0.05	±0.2	±0.1	±0.2

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-2618 (6P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2617A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DATE: MAY 28 2013	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAY 28 2013	