

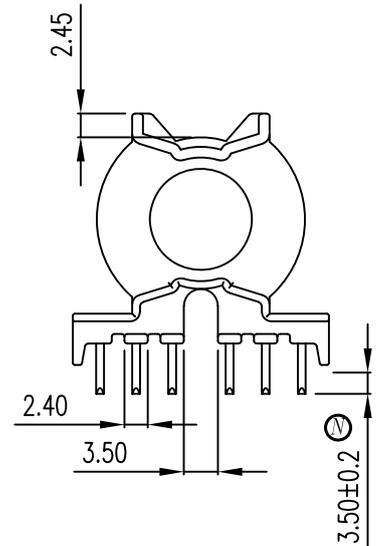
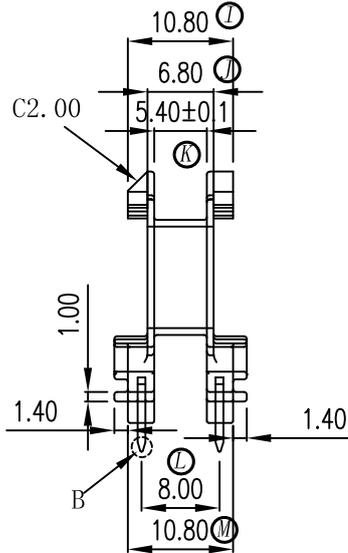




變更前是25.5

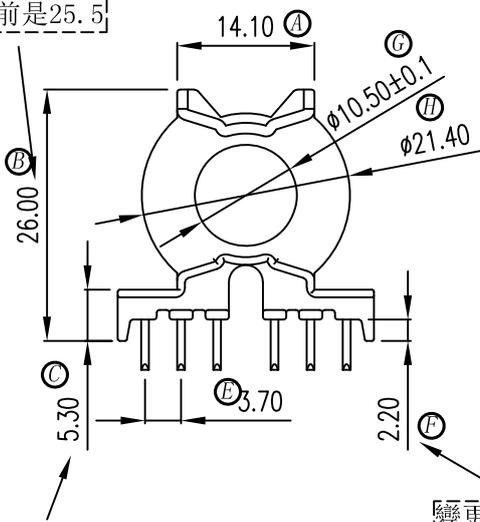

變更前是4.80



變更前是1.70

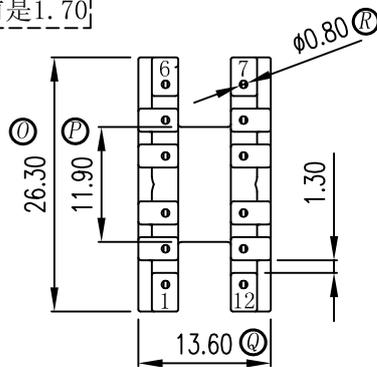

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模
7. PIN位規格:

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	B尺寸25.50改為26.00, C尺寸4.80改為5.30, F尺寸1.70改為2.20	2016/11/30	03	PIN尖处要切面	2017/09/21
02	G尺寸10.50±0.2改為10.50±0.1, K尺寸5.40±0.2改為5.40±0.1	2017/05/16	04		

NAME	PQ-2617 (12P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2623	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	03
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC.: 94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: JAN 27 2015	