

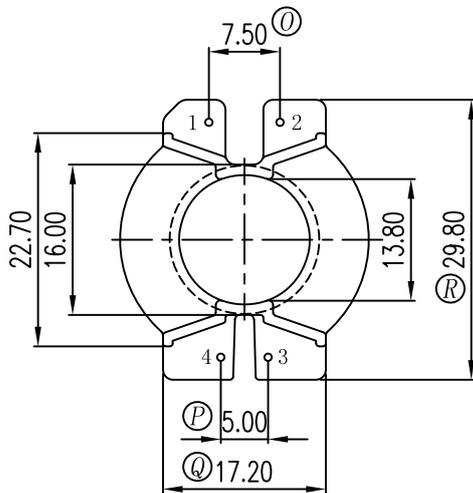
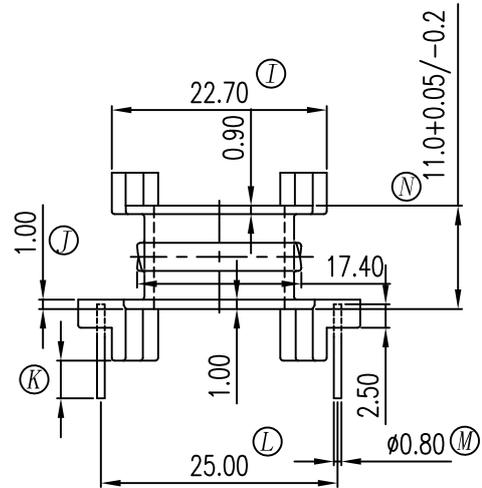
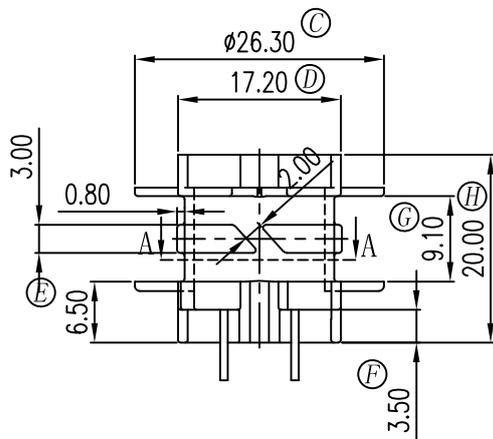


SECTION A-A



備註說明:

1. 模具狀況: 正式模
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. 繞線區中間加3.0VDE。	2012/11/02	03		
02	1. F尺寸由2.50改為3.50, 總高度不變; PIN3, 4邊TOP部V形缺口改為方形缺口	2012/11/26	04		

NAME	PQ-3220 (4P)	MATERIAL	PM-9820	SCALE	1.2:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX 3205	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	02
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>		TOLERANCE OF PIN DIA ± 0.05				PIN TENSION LOAD 1.5 kg MIN	
		TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$				UL REC.: 94V0	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: NOV 26 2012	