

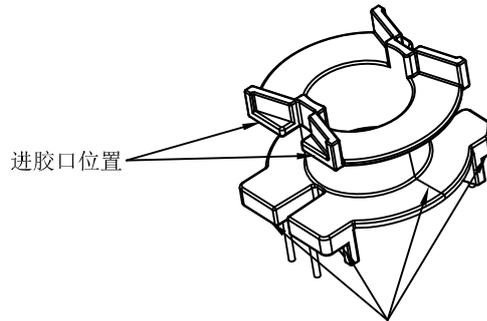
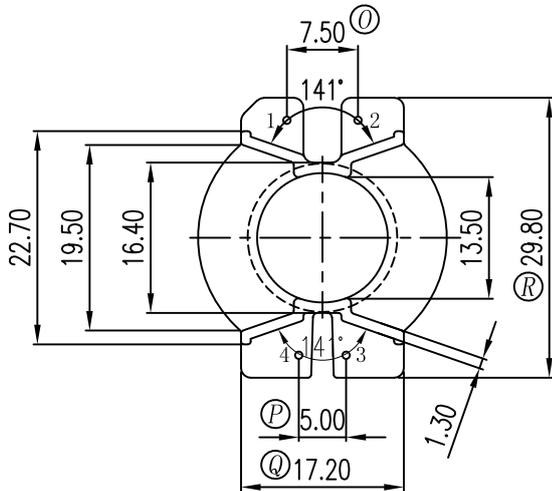


SECTION A-A

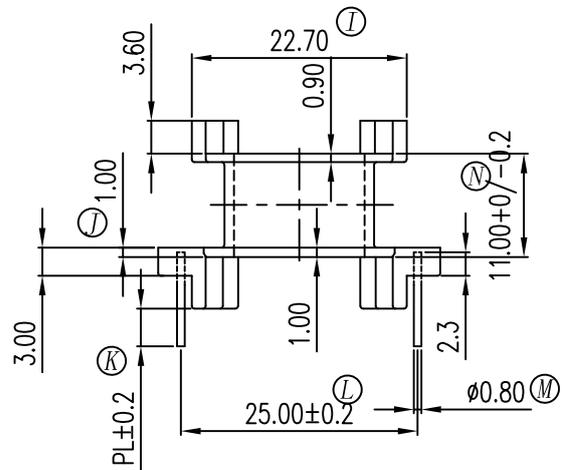


合模线位置

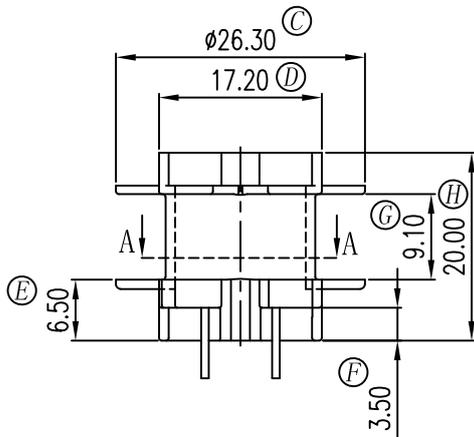

備註說明:

1. 材質: PM-9823
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模



客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|-----------------|------|-----|-----------------|------|
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| NAME | PQ-3220 (4P) | MATERIAL | PM-9823 | SCALE | 1.2/1 | ANGLE | ±1° |
|-----------------------|--------------|--|---------|--|-------------|-------------------|-----|
| DRAWING NO. | HX-3223 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 00 |
| | | 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com | | TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 | | UL REC. :94V0 | |
| DRAWN & DRAFTED BY | LIN HUA JING | CHECKED & APPROVED BY | | DATE: | JAN 29 2013 | | |