


備註說明:

1. PART NO. : HX-3227B 量產模
2. MATERIAL: PM-9820 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: PQ-3230
5. MATERIAL OF PIN :
6. DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. .
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。
7. 強度要求: 1. 80kg MIN
8. 耐壓要求: 4KV/1. 5mA/1分鐘
9. 焊錫溫度: 450° ±10° 3SEC
10. HX-3227A與HX-3227B裝配OK

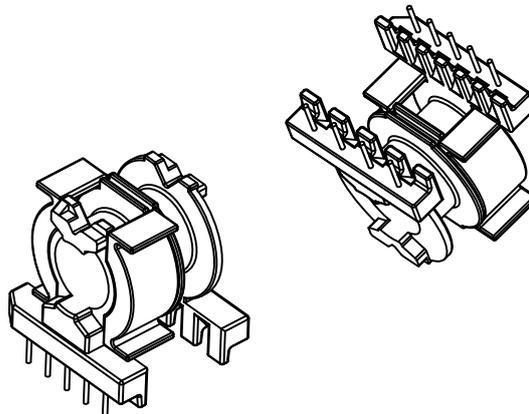

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-3230 CAP	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3227B	PIN MATERIAL		UNIT	m/m	REV.	00
 <p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com</p>	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD kg MIN				UL REC. :94V0		
	TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3						
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	NOV 12 2013		