






进胶口位置，
进胶口宽4.00

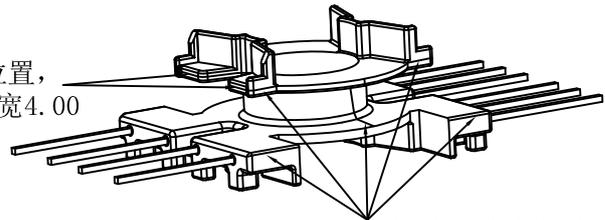

紅色線條是合模線位置

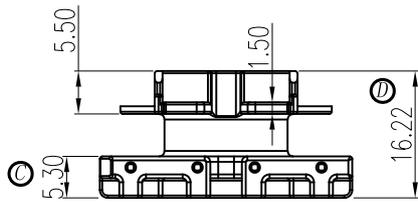

頂部此4個平面平貼度0.20mm MAX

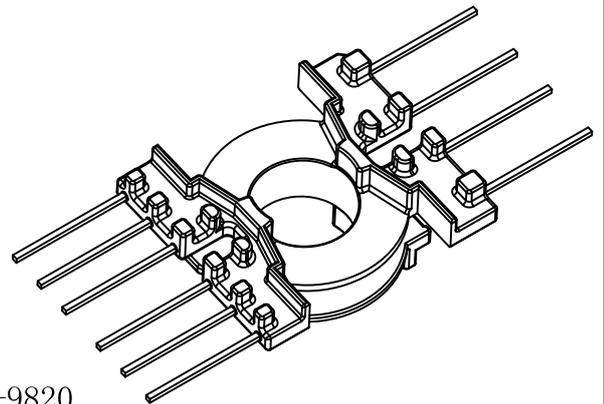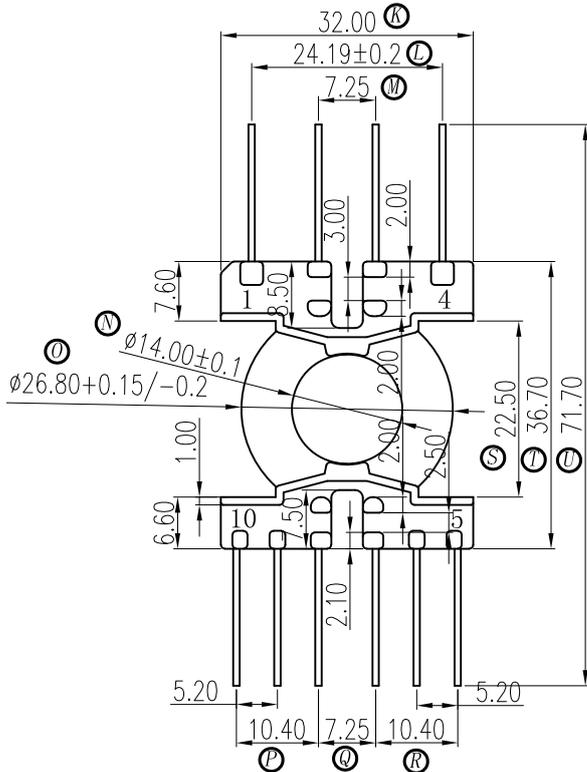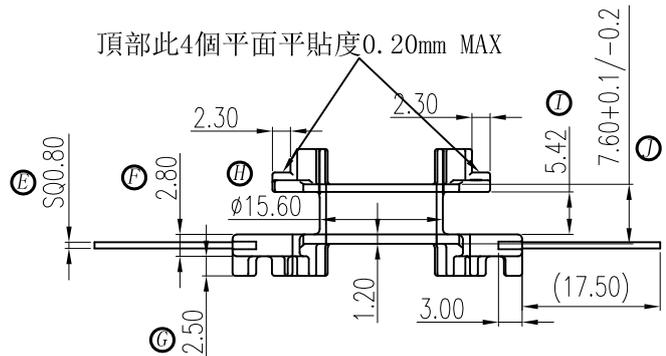

備註說明：

1. 材質：PM-9820
2. 強度要求：1.80kg MIN
3. 耐壓要求：4KV/1.5mA/1分鐘
4. 焊錫溫度：450° ±10° 3SEC
5. 拉力：焊後拉力 1.5kg MIN
6. 模具狀況：量產模

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	客户确认 签回	RoHS HF
18.10±0.2	27.60±0.3	5.30±0.2	16.22±0.3	0.80±0.05	2.80±0.1	2.50±0.1	15.60±0.2	5.42±0.2	7.60±0.1	32.00±0.3	24.19±0.2	7.25±0.2	14.00±0.1	26.80±0.15	10.40±0.2	7.25±0.2	10.40±0.2	22.50±0.3	36.70±0.3	71.70±0.3		
REV.	REVISION RECORD												DATE	REV	REVISION RECORD					DATE		
01														03								
02														04								

NAME	PQ-3217(10P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3242	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD 1.5 kg MIN			UL REC. :94V0			
	TOLERANCE:0<L<4:±0.1 4<L<16:±0.2 16<L<63:±0.3						
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	NOV 29 2017		