

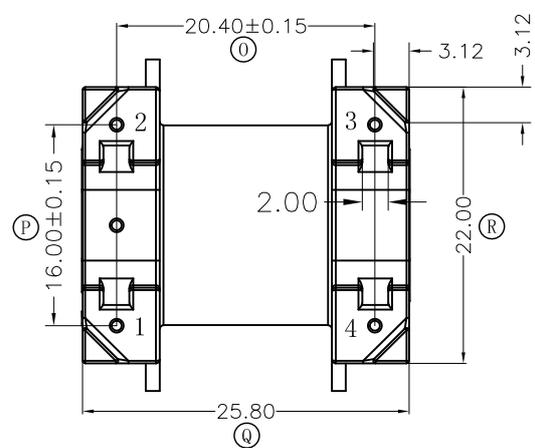
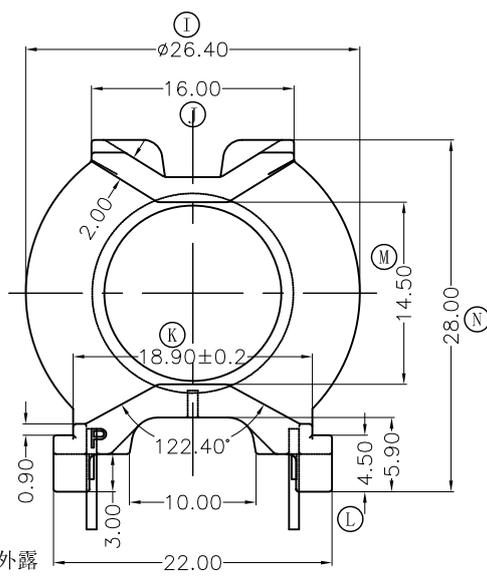


此處刻P字，長1.5寬0.5高0.05

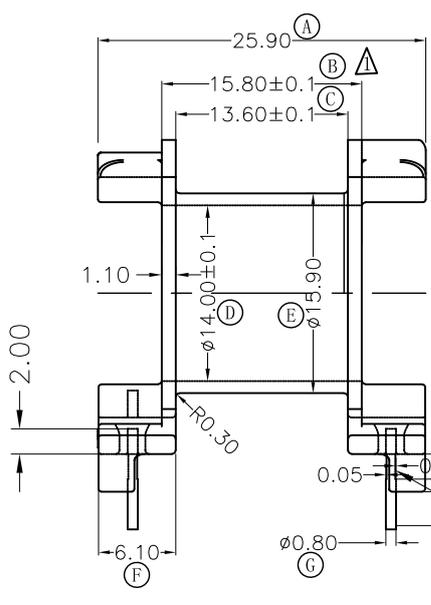

備註說明:

1. 材質: PM9823
2. 強度要求: 2.0kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 正式模

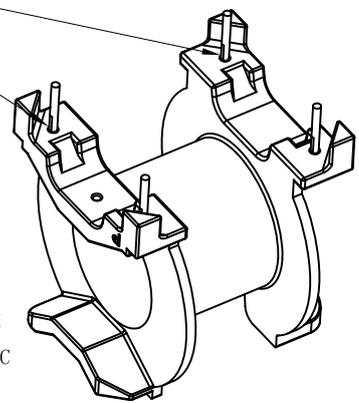

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
25.90	15.80	13.60	14.00	15.90	6.10	0.80	PL	26.40	16.00	18.90	4.50	14.50	28.00	20.40	16.00	25.80	22.00
±0.30	±0.10	±0.10	±0.10	±0.20	±0.20	±0.05	±0.10	±0.30	±0.20	±0.20	±0.20	±0.20	±0.30	±0.15	±0.15	±0.30	±0.30

客户确认
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	△ B尺寸15.80±0.2改為15.80±0.1	2024/05/30	03		
02			04		

NAME	PQ-3225 (4P)	MATERIAL	PM9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3251	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05		⊕		≡	
		PIN TENSION LOAD kg MIN		UL REC. :94V0			
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
DRAWN & DRAFTED BY		Liu Xiong		CHECKED & APPROVED BY		DATE: JUL 31 2020	