
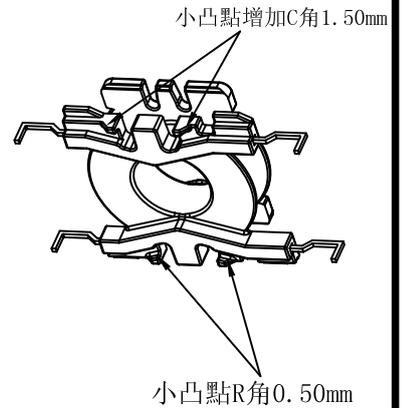

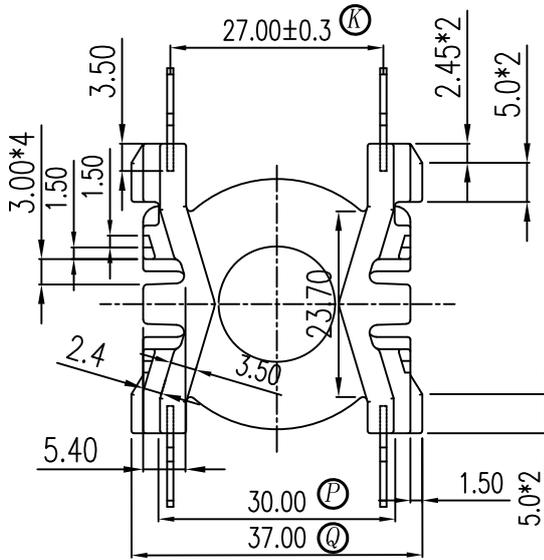
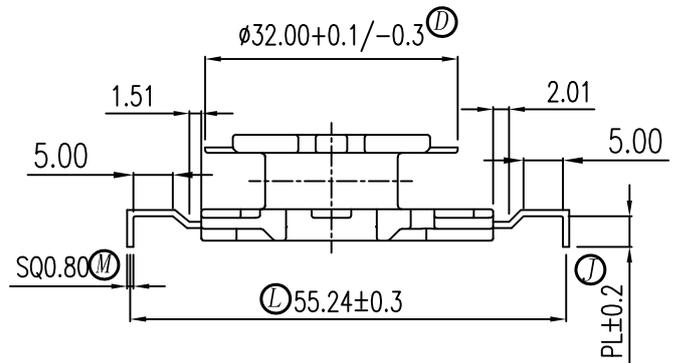


備註說明:

1. 材質: PF-2736
2. 強度要求: 1.50kg MIN,
3. 耐壓要求: 4KV/0.5mA/3S
4. 焊錫溫度: 440° ±10° 3SEC
5. 拉力: 焊錫前1.50kg MIN, 焊錫後2.00kg MIN
6. 模具狀況: 量產模

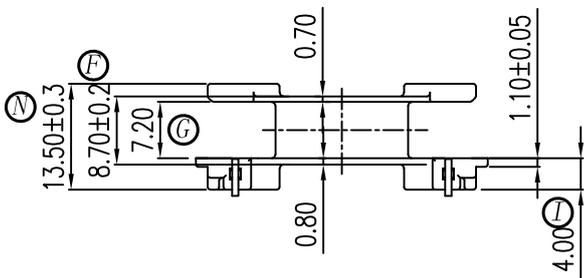

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
34.00	37.00	14.80	32.00	23.00	8.70	7.20	16.80	4.00	PL	27.00	55.24	0.80	13.50	25.00		37.00
±0.3	±0.3	±0.1	+0.1/-0.3	±0.3	±0.2	±0.2	±0.3	±0.1	±0.2	±0.3	±0.3	±0.05	±0.3	±0.3		±0.3

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-3816 (4P)	MATERIAL	PF-2736	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-3822	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		DRAWN & DRAFTED BY		CHECKED & APPROVED BY	
		LIN HUA JING					