
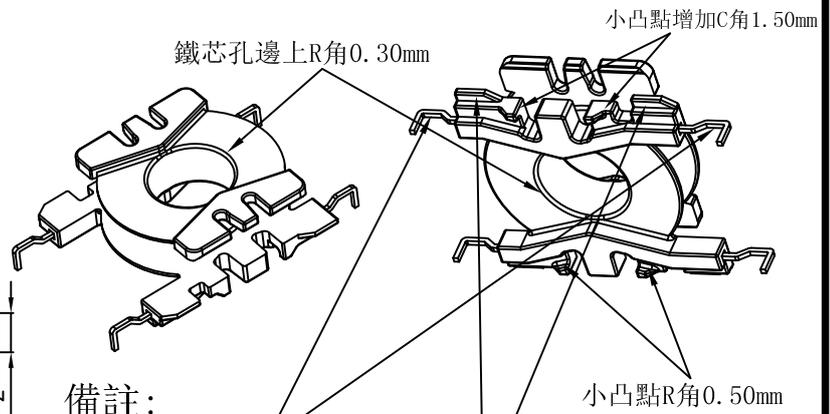
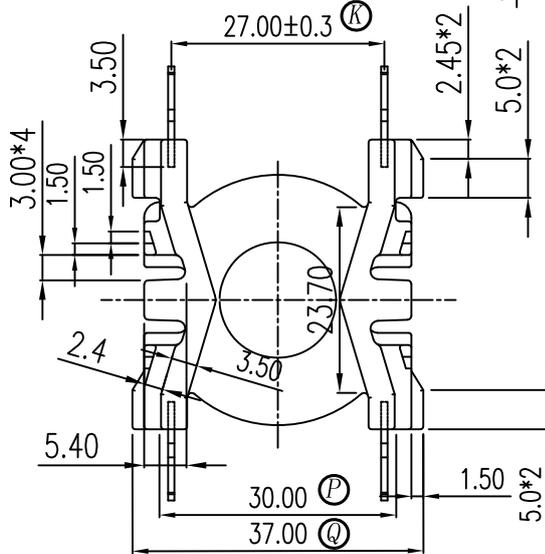
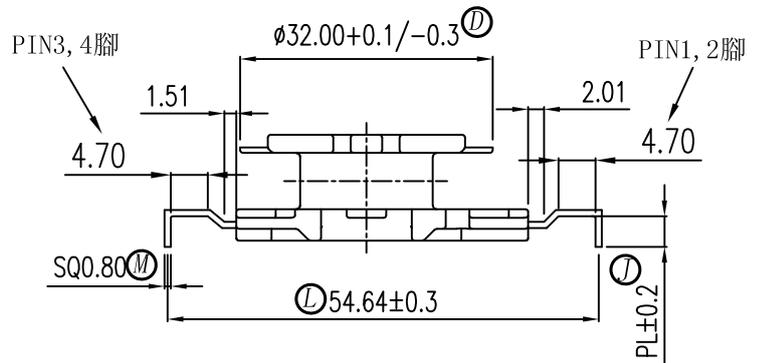


備註說明:

1. 材質: PF-2736
2. 強度要求: 葉片強度1.80kg MIN, 其他部位2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 2.00kg MIN
6. 模具狀況: 量產模

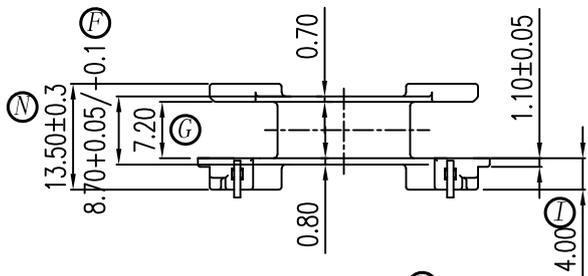

備註:

1. 4個PIN的彎角處底部需在同一水平面。
2. 兩邊BASE側邊4個凸點底部需在同一水平面。

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
34.00	37.00	14.80	32.00	23.00	8.70	7.20	16.80	4.00	3.70	27.00	54.64	0.80	13.50	25.00	30.00	37.00	
±0.3	±0.3	±0.2	+0.1/-0.3	±0.3	+0.05/-0.1	±0.2	±0.3	±0.1	±0.2	±0.3	±0.3	±0.05	±0.3	±0.3	±0.3	±0.3	

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-3816 (4P)	MATERIAL	PF-2736	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-3824	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DATE: OCT 28 2015	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY			