

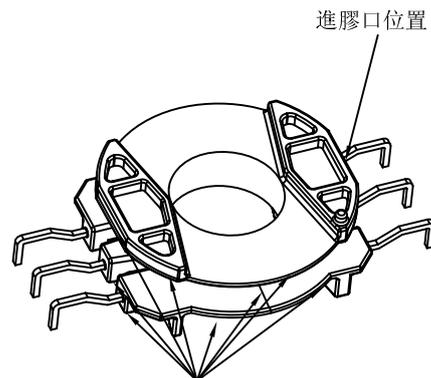
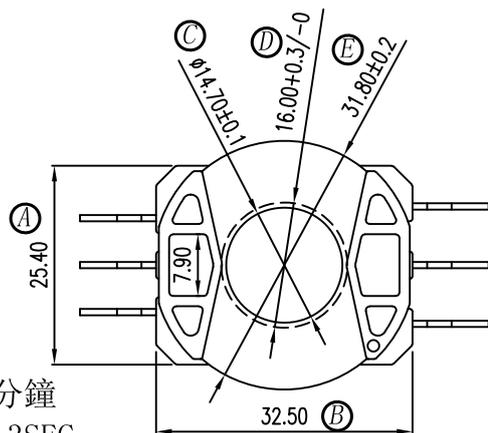
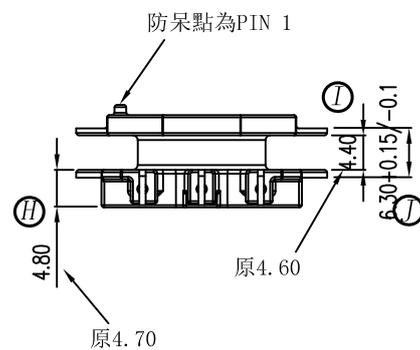


備註說明:


1. 材質: PM-9820
2. 強度要求: 1.80kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.50kg MIN
6. 模具狀況: 量產模

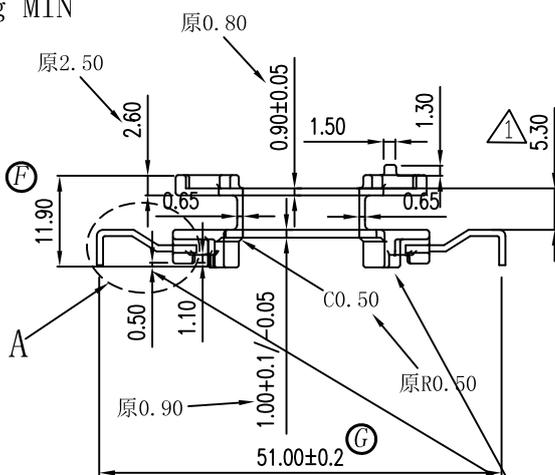



紅色線條是合模線位置



PIN此平面須在同一水平面

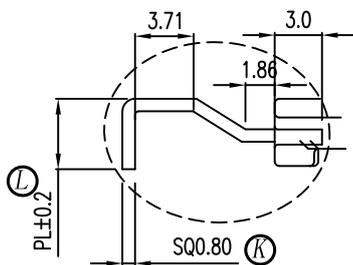

DETAIL A (2:1)

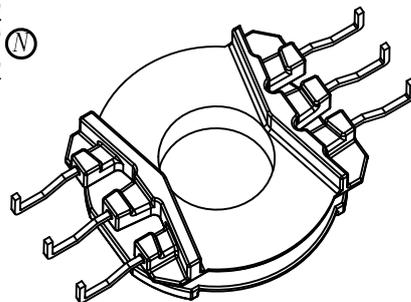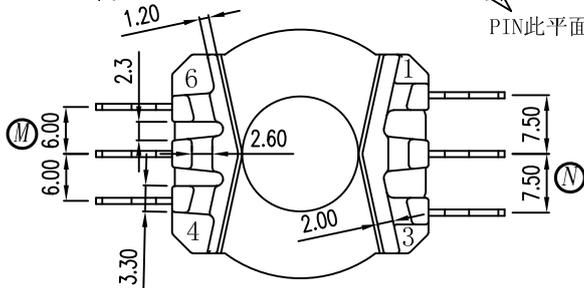

A	B	C	D	E	F	G	H	I	J	K	L	M	N
25.40	32.50	14.70	16.00	31.80	11.90	51.00	4.80	4.40	6.30	0.80	PL	6.00	7.50
±0.3	±0.3	±0.1	+0.3/-0	±0.2	±0.2	±0.2	±0.2	±0.2	+0.15/-0.1	+0.05/-0.05	±0.2	±0.2	±0.3

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	△ 尺寸5.70改為5.30	2022/03/22	03		
02			04		

NAME	PQ-3813 (6P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3826	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA	±0.05	
PIN TENSION LOAD	kg MIN	UL REC. : 94V0
TOLERANCE:	0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:	NOV 01 2016	