
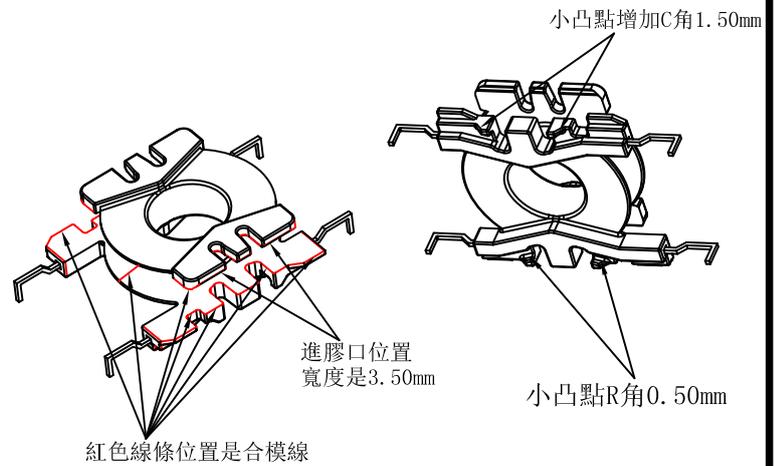
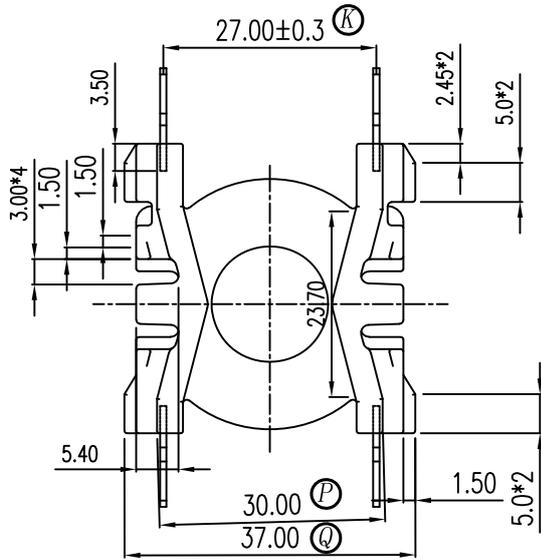
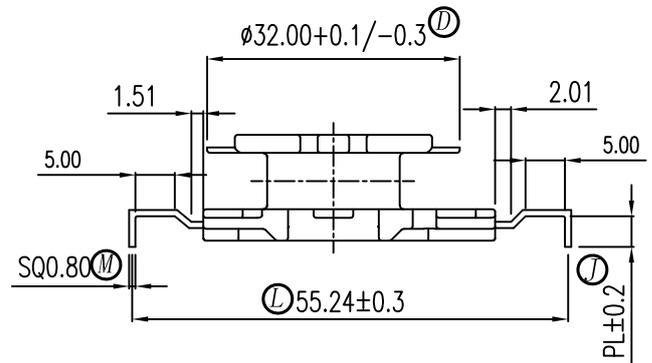


備註說明:

1. 材質: PF-2736
2. 強度要求: 1.50kg MIN,
3. 耐壓要求: 4KV/1mA/60S
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊錫前1.50kg MIN, 焊錫後1.80kg MIN
6. 模具狀況: 量產模

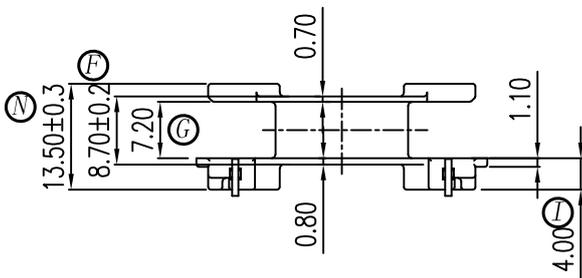

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
34.00	37.00	14.80	32.00	22.00	8.70	7.20	16.80	4.00	PL	27.00	55.24	0.80	13.50	25.00	30.00	37.00				
±0.3	±0.3	±0.1	+0.1/-0.3	±0.3	±0.2	±0.2	±0.3	±0.1	±0.2	±0.3	±0.3	±0.05	±0.3	±0.3	±0.3	±0.3				

客户确认
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-3816 (4P)	MATERIAL	PF-2736	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3828	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com	TOLERANCE OF PIN DIA		±0.05			UL REC. :94V0	
	PIN TENSION LOAD		kg MIN				
	TOLERANCE:		0<L≤4: ±0.1	4<L≤16: ±0.2	16<L≤63: ±0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	DEC 10 2017		