
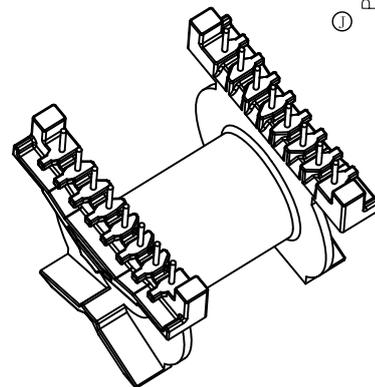
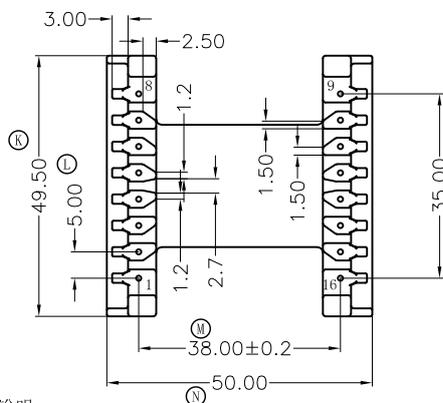
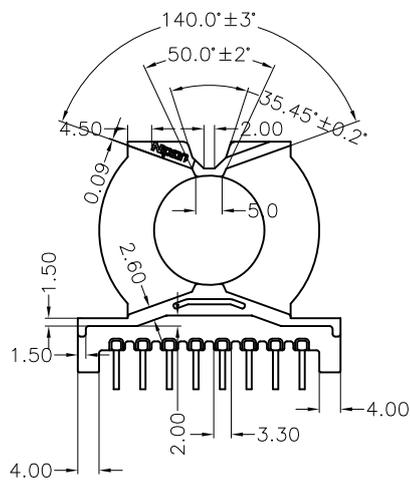
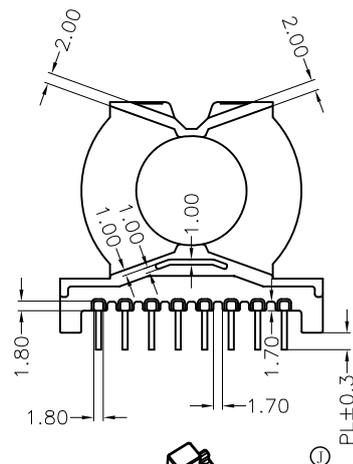
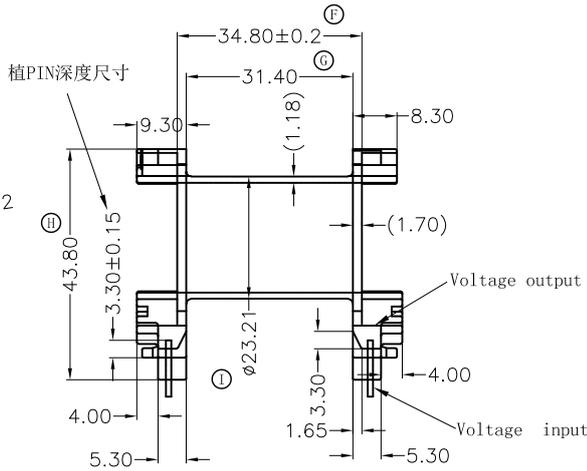


紅色線條位置是合模線

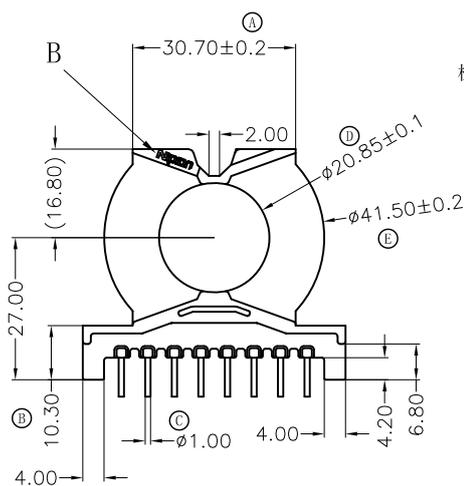

備註說明:

1. 材質: PM-9630
2. 強度要求: 3.0kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 2.0kg MIN
6. 模具狀況: 樣品模

NOTE:

1. PIN TENSION STRENGTH: 2.0kg MIN(AFTER SOLDERD)
2. HI-POT REQUIREMENT: 4KV/1.5mA/1 MINUTES
3. MOLD TYPE: SOFT MOLD

CUSTOMER COUNTERSIGN



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	PQ-5050H(16P)	BOBBIN MATERIAL	PM-9630 MINIMUM THICKNESS: 0.71mm	SCALE	1:1	ANGLE	±1°
CUSTOMER P/N	PQ5050-H-16P						
DRAWING NO.	HX-5013	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD 2.0 kg MIN		UL REC. :94V0			
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: SEP 19 2023	